

NovaGuard Integration Guide

Contents

1 NovaGuard (On–Premises) 1

1.1 NovaMDR 1

1.2 NovaXDR 4

1.3 NovaCommand 7

2 NovaGuard (SaaS) 11

2.1 NovaMDR 11


2.2 NovaXDR 14

1 NovaGuard (On-Premises)

1.1 NovaMDR


- **Integration Method**: NovaGuard can be integrated with NovaMDR using the password.
- **Version Requirements**: No specific version requirements for NovaMDR.
- **Procedure:**

Step 1: Log in to NovaMDR, go to the **Customers** page, and click the name of a customer, as shown in the figure below:

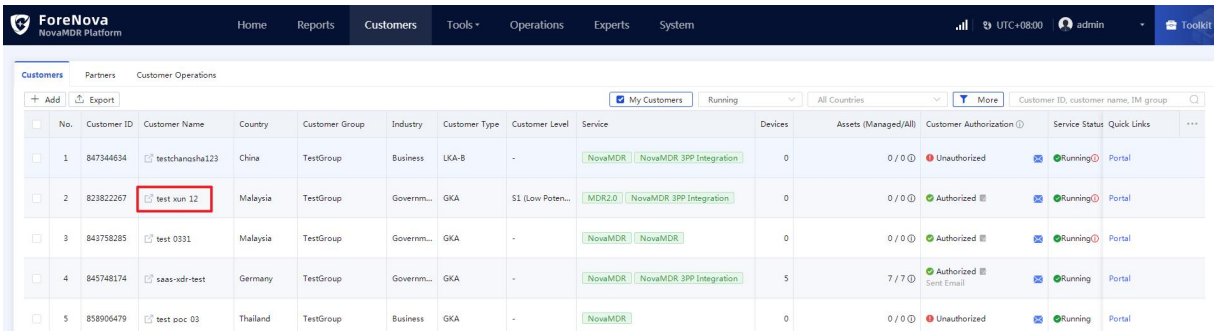


Step 2: Go to **Customers** > **Integrated Devices**, click **Add**, and select **NovaGuard/Endpoint Secure** for **Type** and **NovaXDR** for **Integration Platform**. Enter **Device Name**, **Username**, **Password**, and relevant information and click **Copy Integration Info**, as shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Integration Platform** to ensure that NovaGuard can be integrated with NovaMDR.

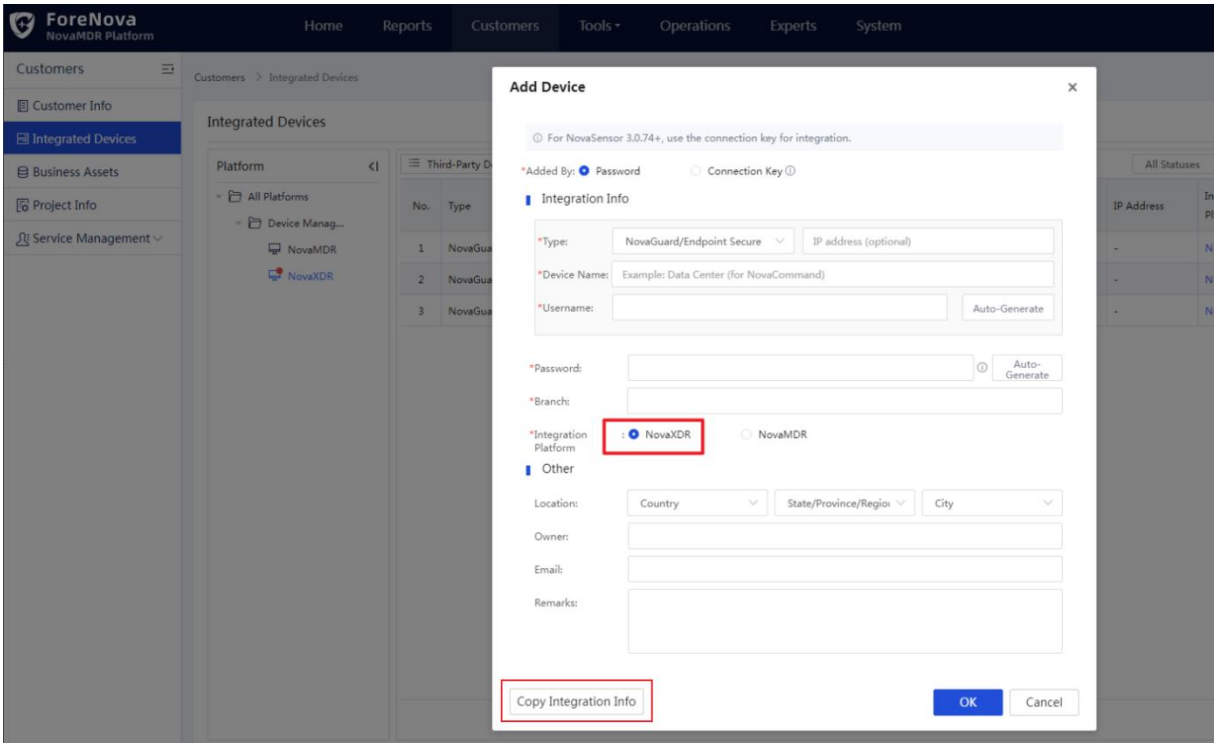


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

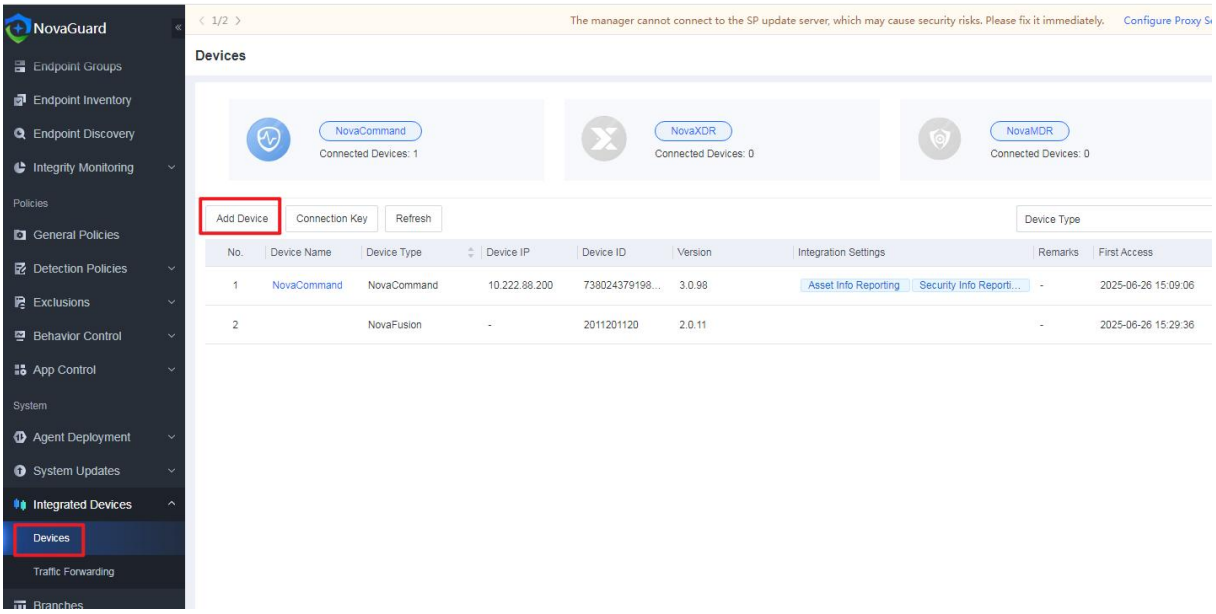


Step 4: In the **Add Device** pop-up window, select **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the integration information copied in Step 2, enter the CorpID obtained in Step 3 and other required information, and click **Next**, as

shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Device Type** to ensure that NovaGuard can be integrated with NovaMDR.

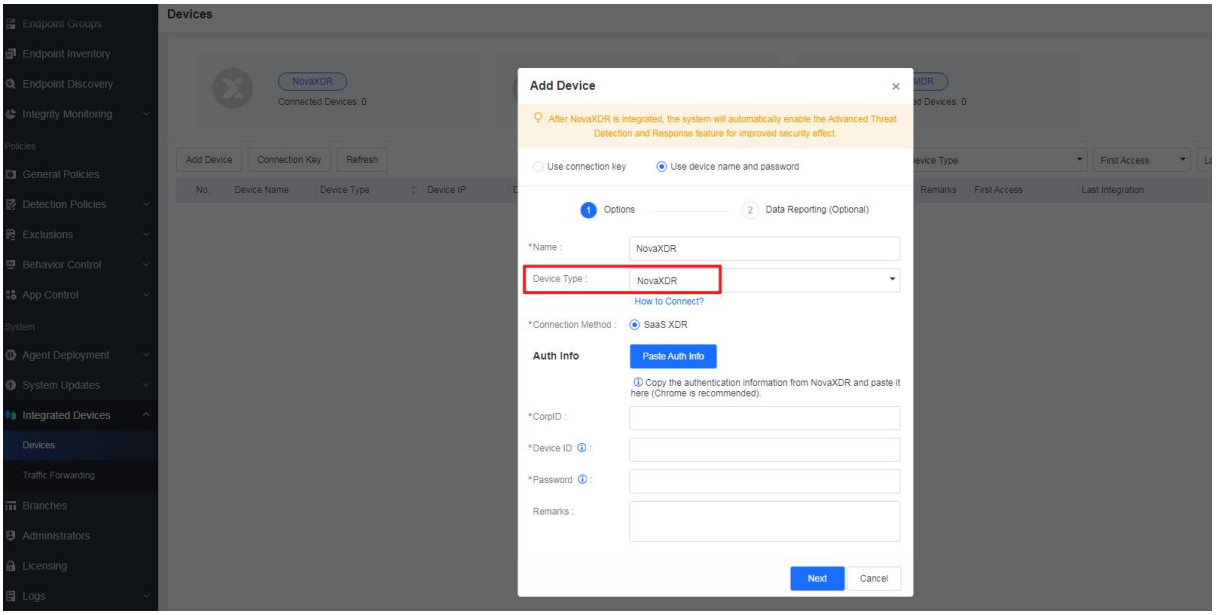


Step 5: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

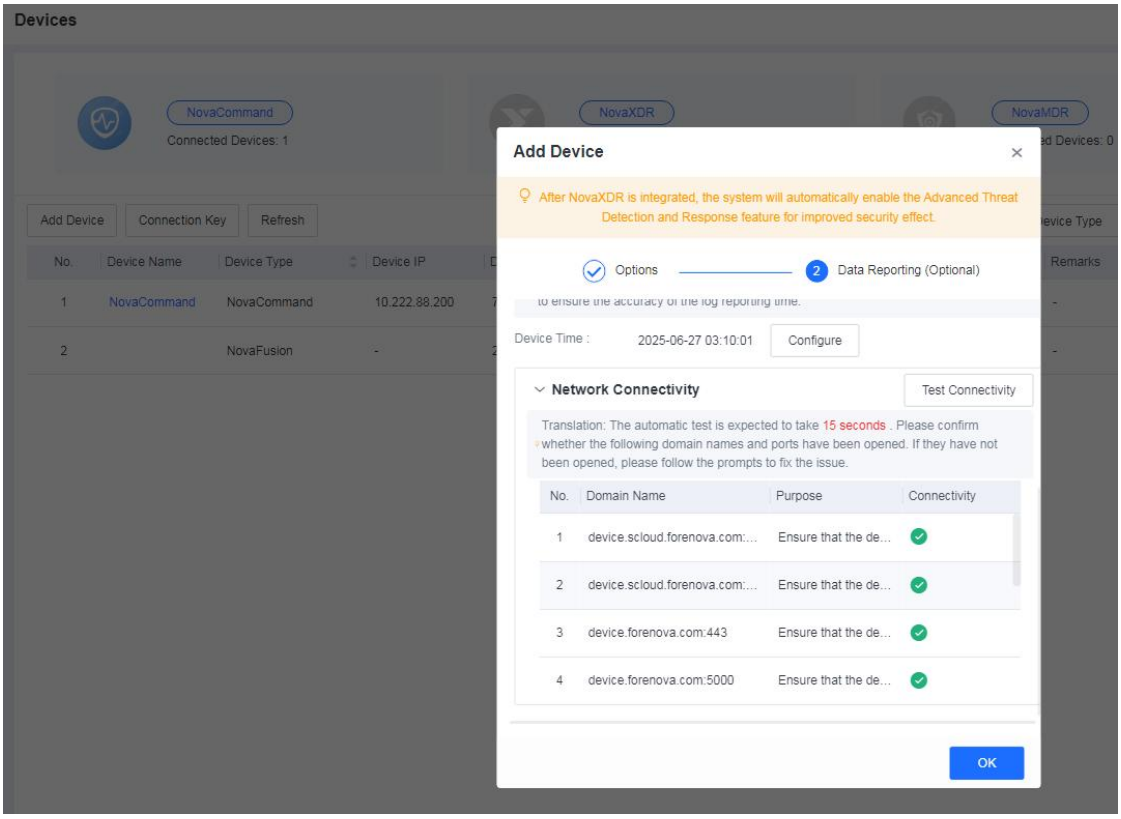


1.2 NovaXDR

- **Integration Method:** NovaGuard can be integrated with NovaXDR using the password.
- **Version Requirements:** No specific version requirements for NovaXDR.
- **Procedure:**


Step 1: Log in to NovaXDR, go to **Configuration** > **Device Connection** > **Native Devices**, and click **Add**. In the **Add Device** pop-up window, select **NovaGuard** for **Device Type**, enter the required information, and click **Copy Auth Info and Confirm**, as shown in the figure below:

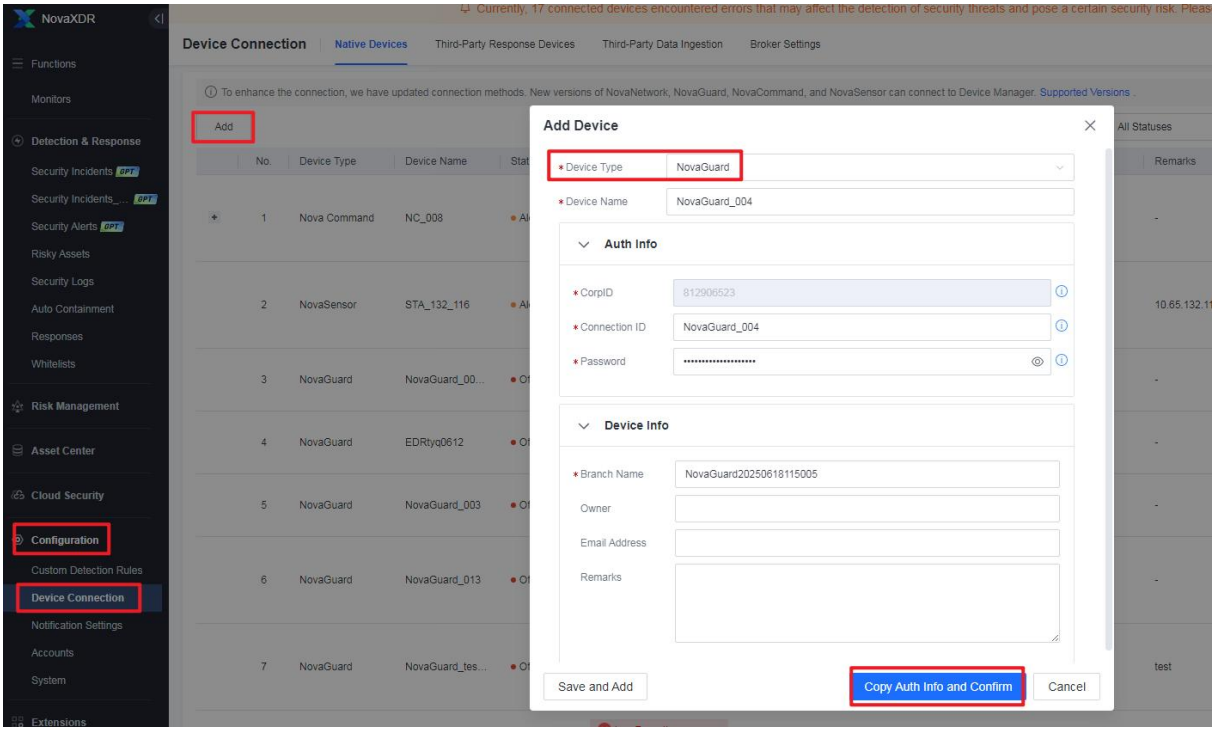


Step 2: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

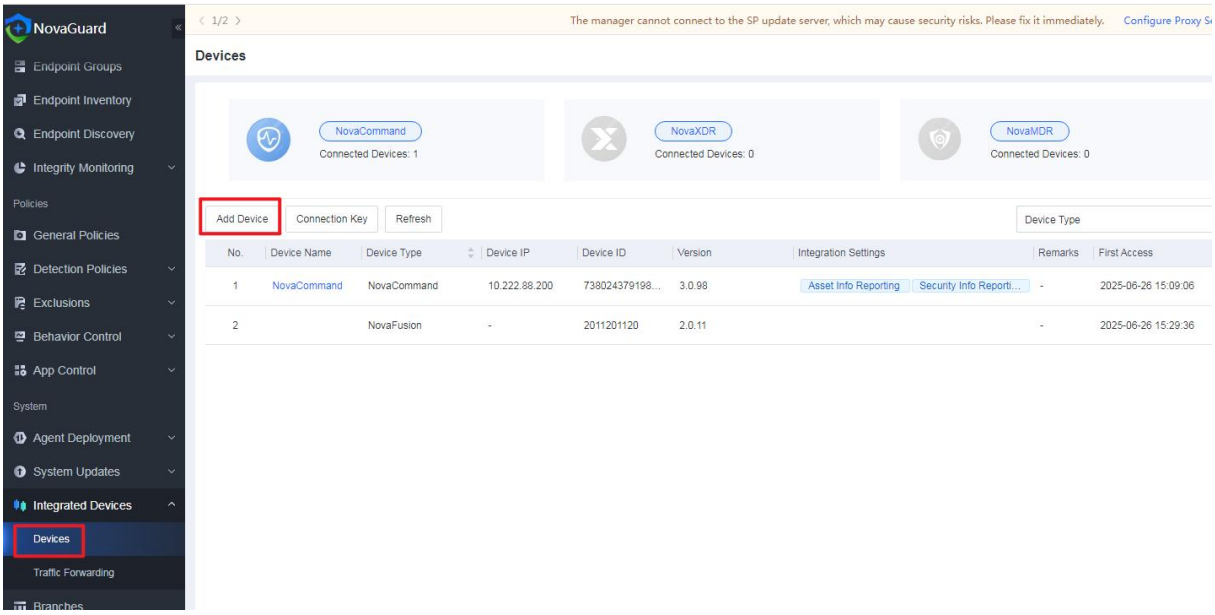

Step 3: In the **Add Device** pop-up window, click **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the authentication information copied from NovaXDR, and click **Next**, as shown in the figure below:

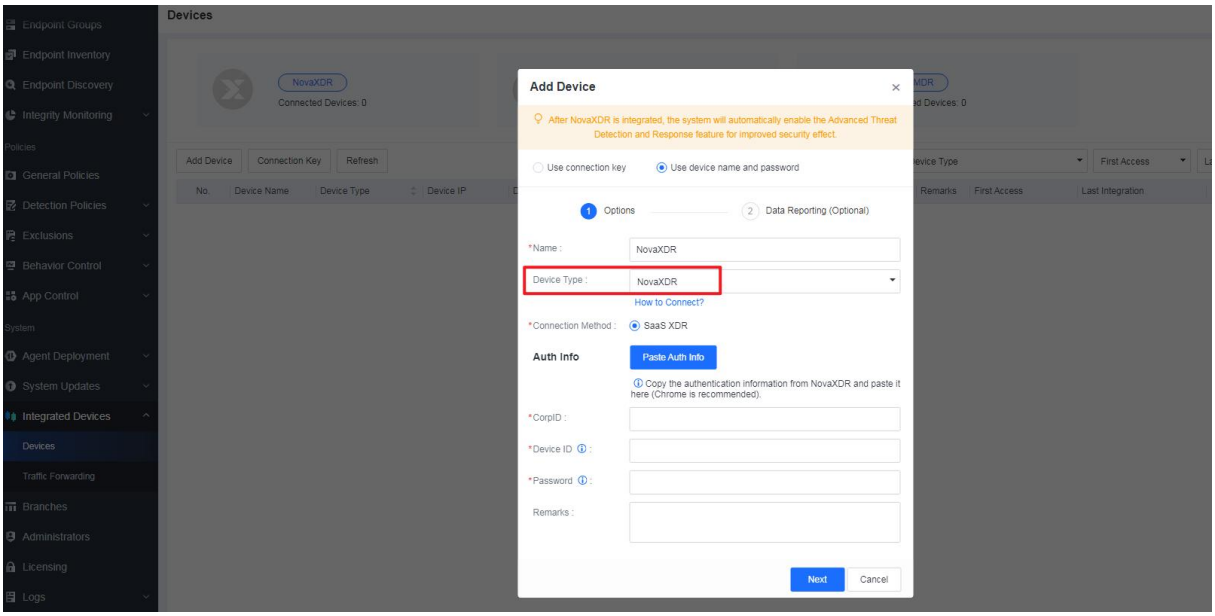

Step 4: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

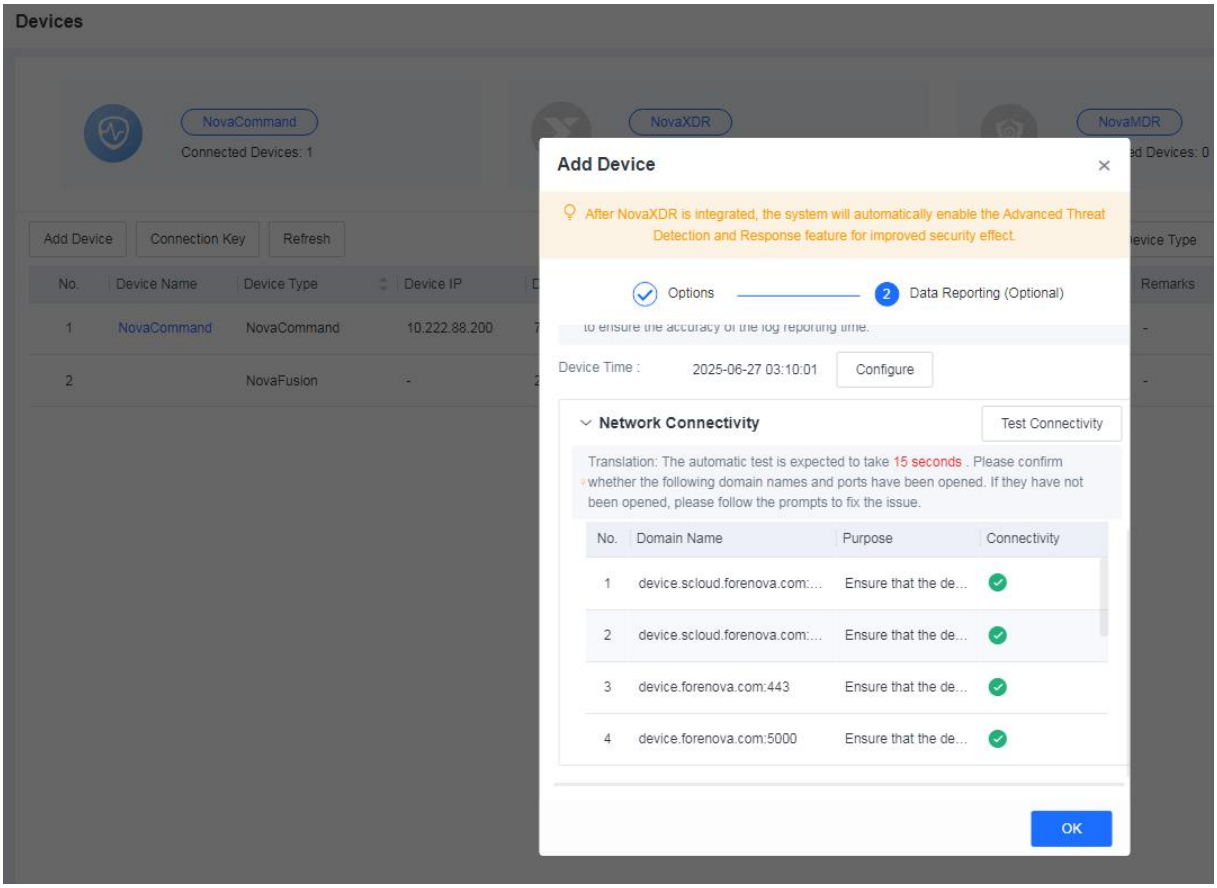

Devices
NovaCommand
Connected Devices: 1
NovaXDR
NovaMDR
Add Device
Connection Key
Refresh
No.
Device Name
Device Type
Device IP
Remarks
1
NovaCommand
NovaCommand
10.222.88.200
2
NovaFusion
Add Device
After NovaXDR is integrated, the system will automatically enable the Advanced Threat Detection and Response feature for improved security effect.
Options
2
Data Reporting (Optional)
Device Time :
2025-06-27 03:10:01
Configure
Network Connectivity
Test Connectivity
Translation: The automatic test is expected to take 15 seconds . Please confirm whether the following domain names and ports have been opened. If they have not been opened, please follow the prompts to fix the issue.
No.
Domain Name
Purpose
Connectivity
1
device.scloud.forenova.com:...
Ensure that the de...
2
device.scloud.forenova.com:...
Ensure that the de...
3
device.forenova.com:443
Ensure that the de...
4
device.forenova.com:5000
Ensure that the de...
OK

1.3 NovaCommand


- **Integration Method:** NovaGuard can be integrated with NovaCommand using the connection key or password.
- **Version Requirements:** NovaCommand 3.0.86 and later.
- **Procedure:**

Part 1: Integration


Step 1: Log in to NovaCommand, go to **System** > **Devices** > **Sensor Devices**, and click **New**, as shown in the figure below:

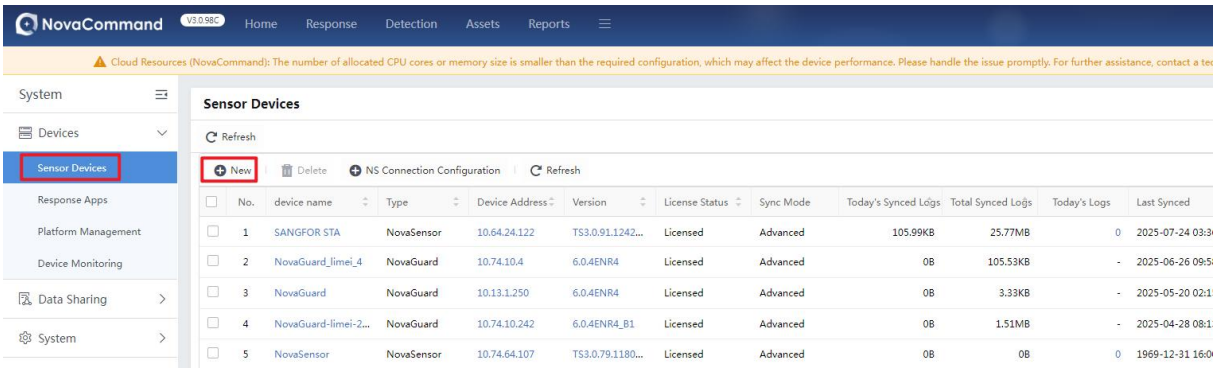


Step 2: In the **New** pop-up window, select **NovaGuard** for **Type**, specify a custom device name, enter the IP address of the NovaGuard manager for **Device IP**, select **3.8.8 and later** for **Version**, click **Generate Integration Key**, and click **Copy the above integration information**, as shown in the figure below:

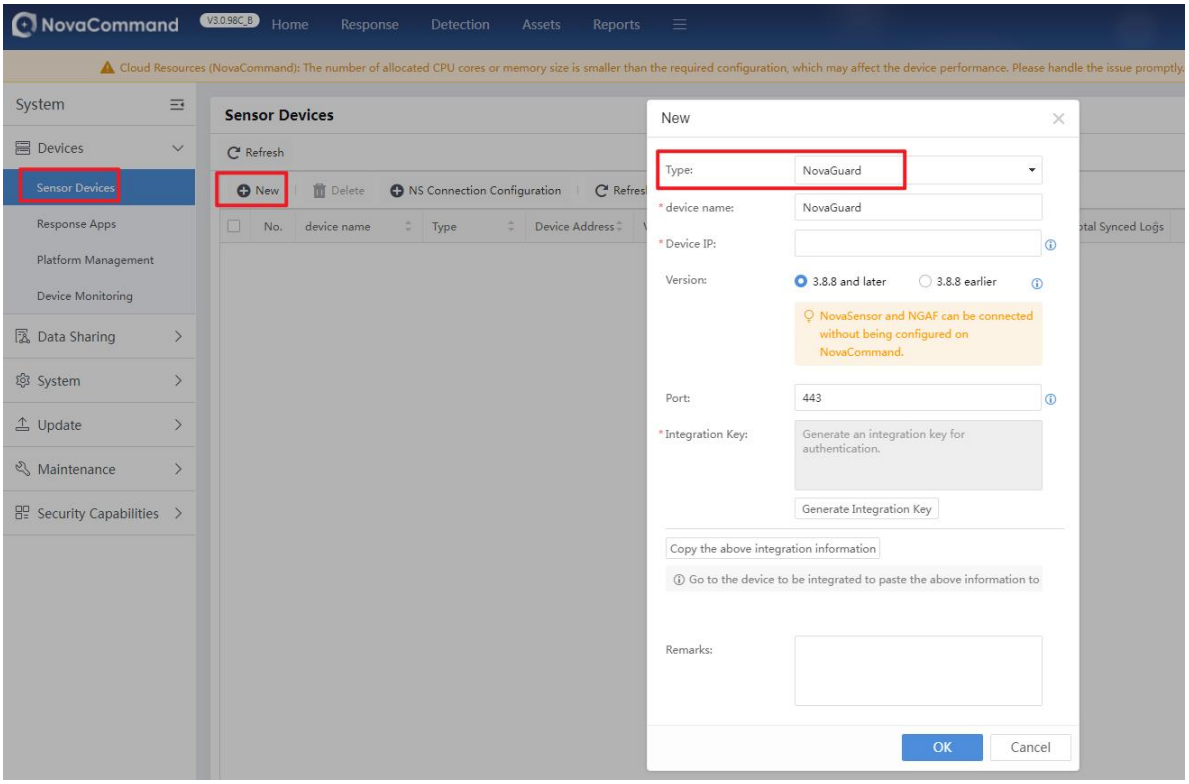


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

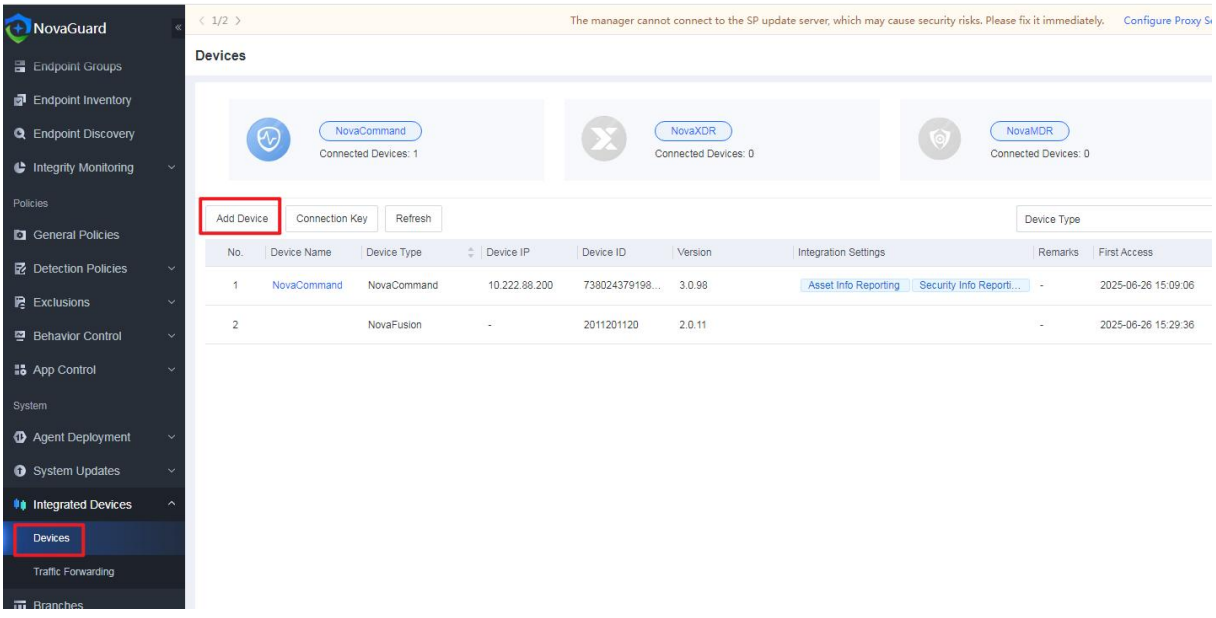

Step 4: In the **Add Device** pop-up window, select **Use connection key**, paste the connection key copied in Step 2, and click **Next**, as shown in the figure below:

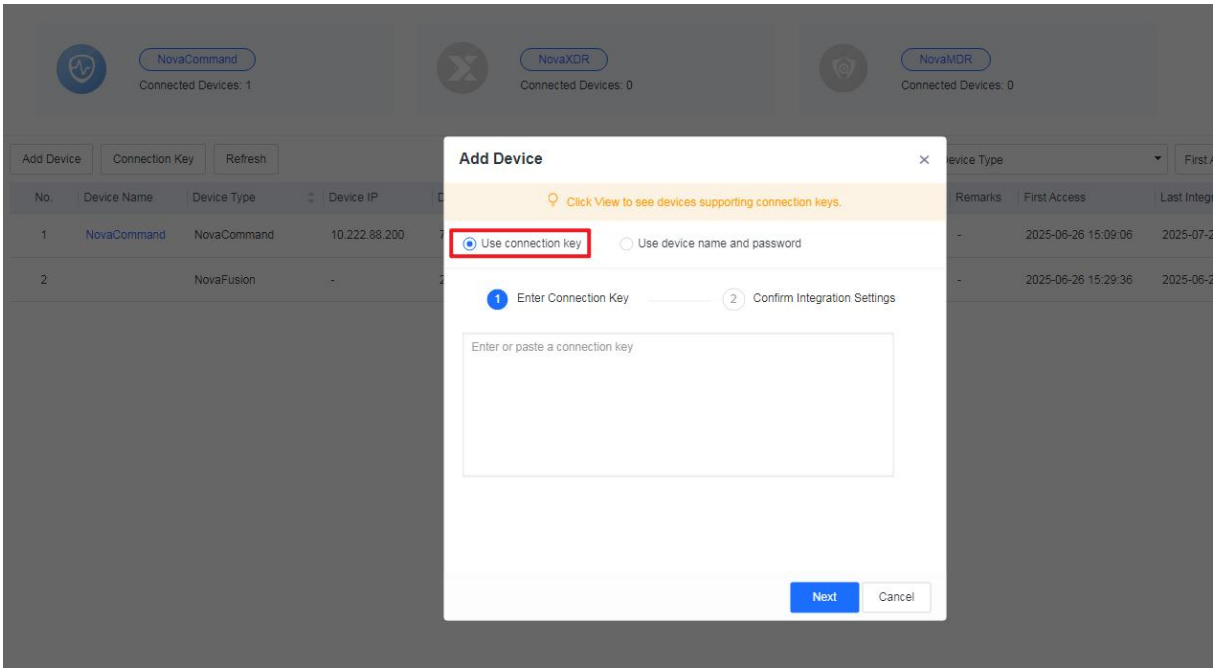


Step 5: After the integration is successful, a device of the **NovaCommand** type will appear on the **System** > **Integrated Devices** > **Devices** page in the NovaGuard manager, as shown in the figure below:

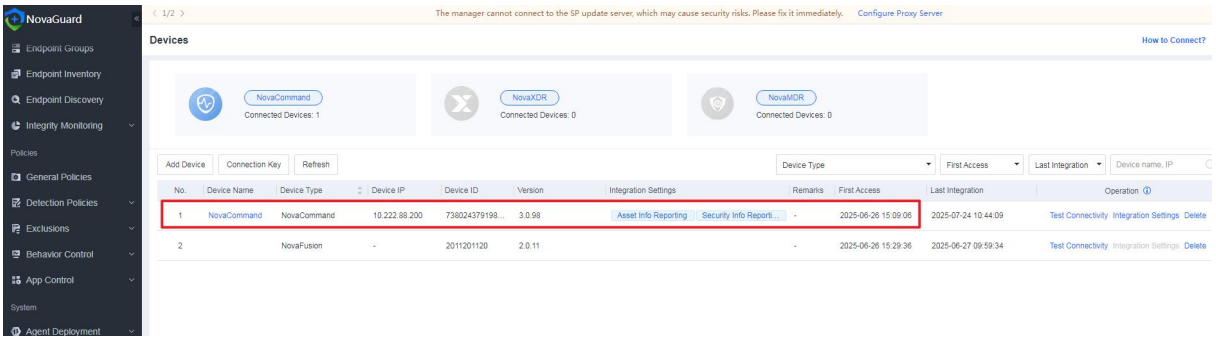


Part 2: Coordinated Response

Step 1: Log in to NovaCommand, go to **System** > **Devices** > **Response Apps**, and click **NovaGuard**, as shown in the figure below:

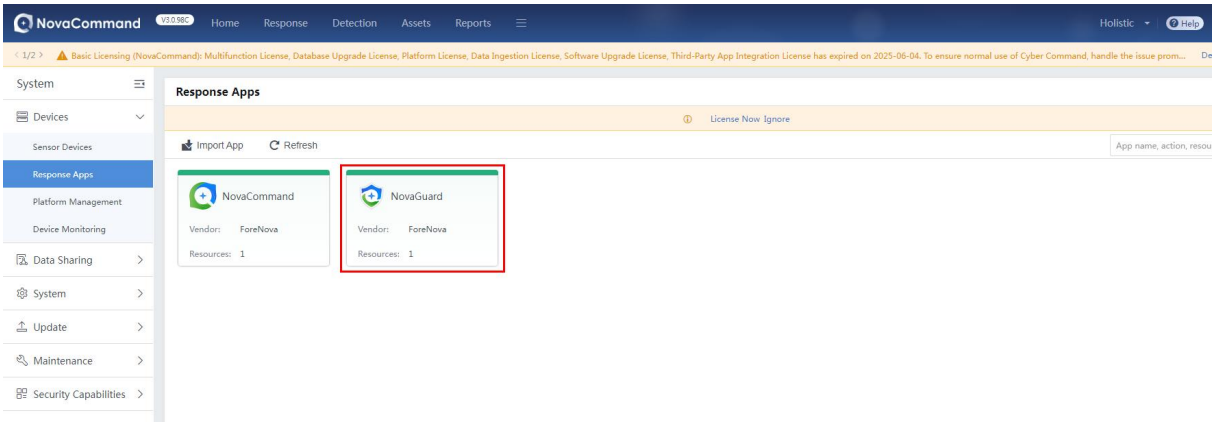

Step 2: In the **Resource Configuration** section, click **New**. In the **Add Resource** pop-up window, enter the required information and click **OK**, as shown in the figure below:

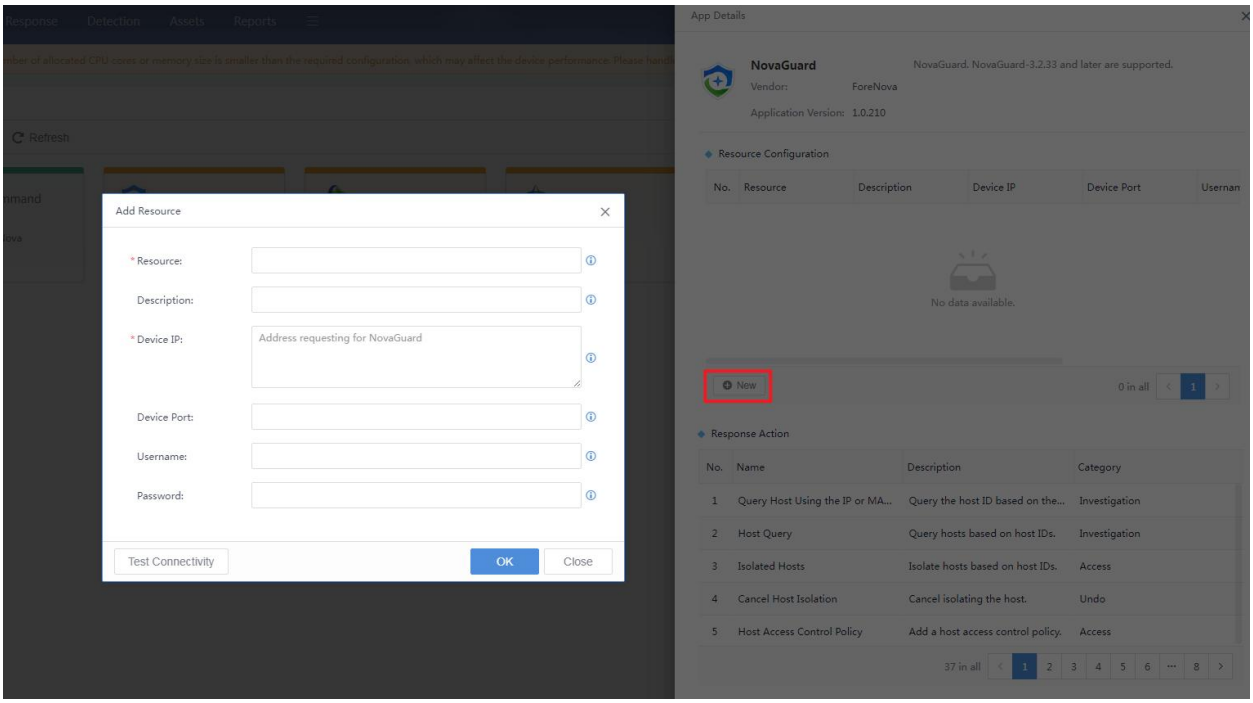


2 NovaGuard (SaaS)

2.1 NovaMDR


- **Integration Method**: NovaGuard can be integrated with NovaMDR using the password.
- **Version Requirements**: No specific version requirements for NovaMDR.
- **Procedure:**

Step 1: Log in to NovaMDR, go to the **Customers** page, and click the name of a customer, as shown in the figure below:

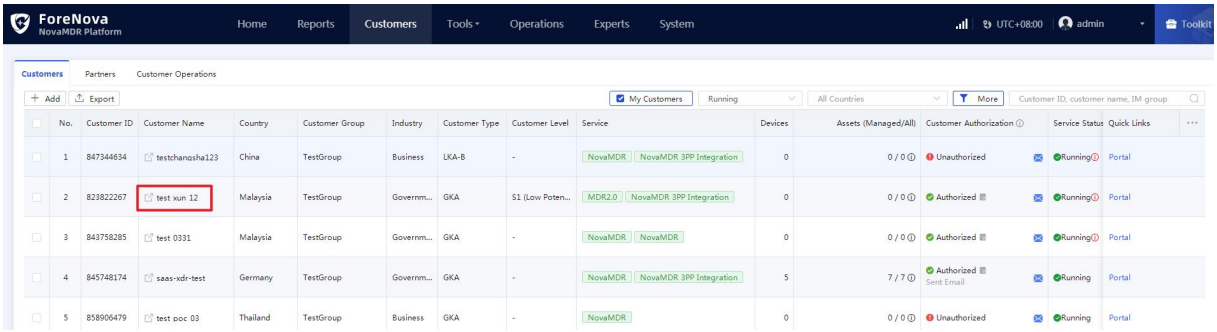


Step 2: Go to **Customers** > **Integrated Devices** and select **SAAS–NovaGuard** for **Type**, as shown in the figure below. Note: The **Username**, **Password**, and other relevant information of NovaGuard will automatically sync from NovaFusion, so there is no need to add NovaGuard devices manually.


Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Integration Platform** to ensure that NovaGuard can be integrated with NovaMDR.

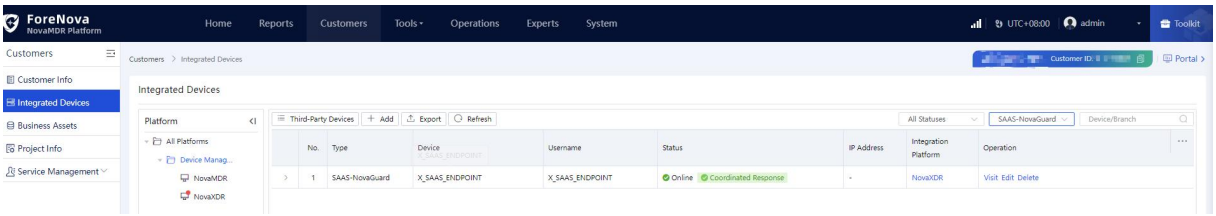

Click **Edit** in the **Operation** column of the NovaGuard device entry, then click **Copy Integration Info** to copy the information, as shown in the figure below:

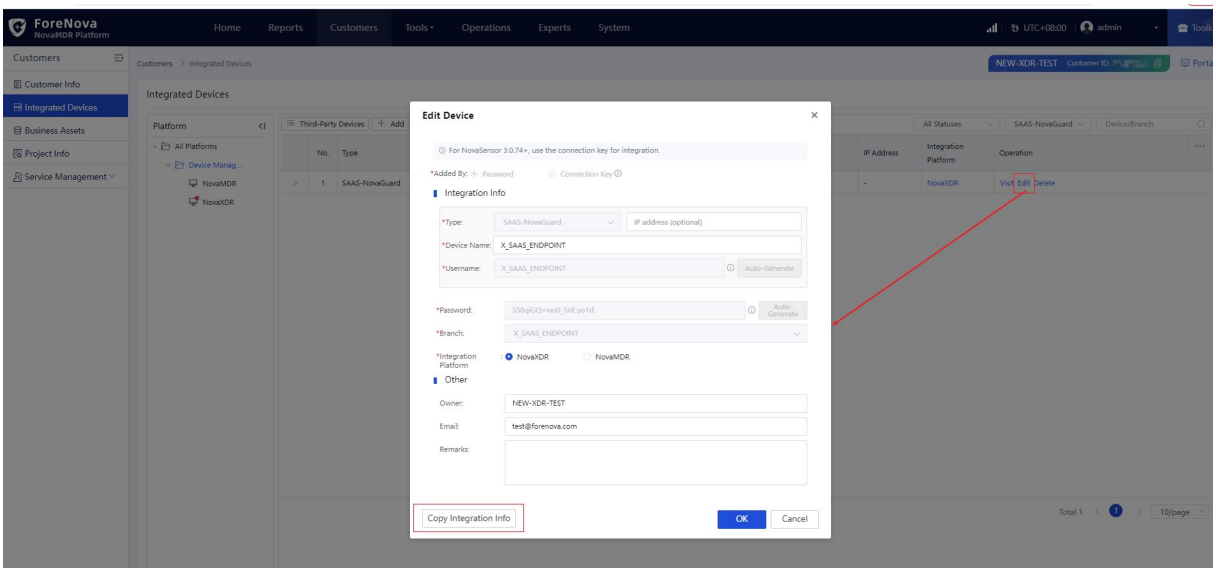


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

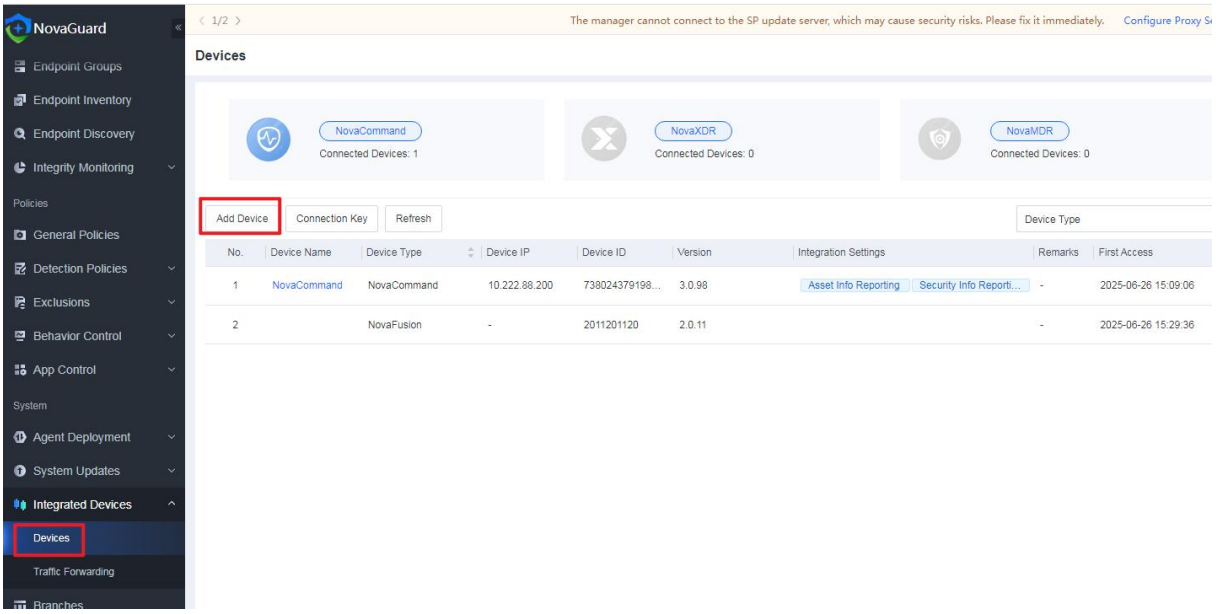


Step 4: In the **Add Device** pop-up window, select **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the integration information copied in Step 2, enter other required information, and click **Next**, as shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Device Type** to ensure that NovaGuard can be integrated with NovaMDR.

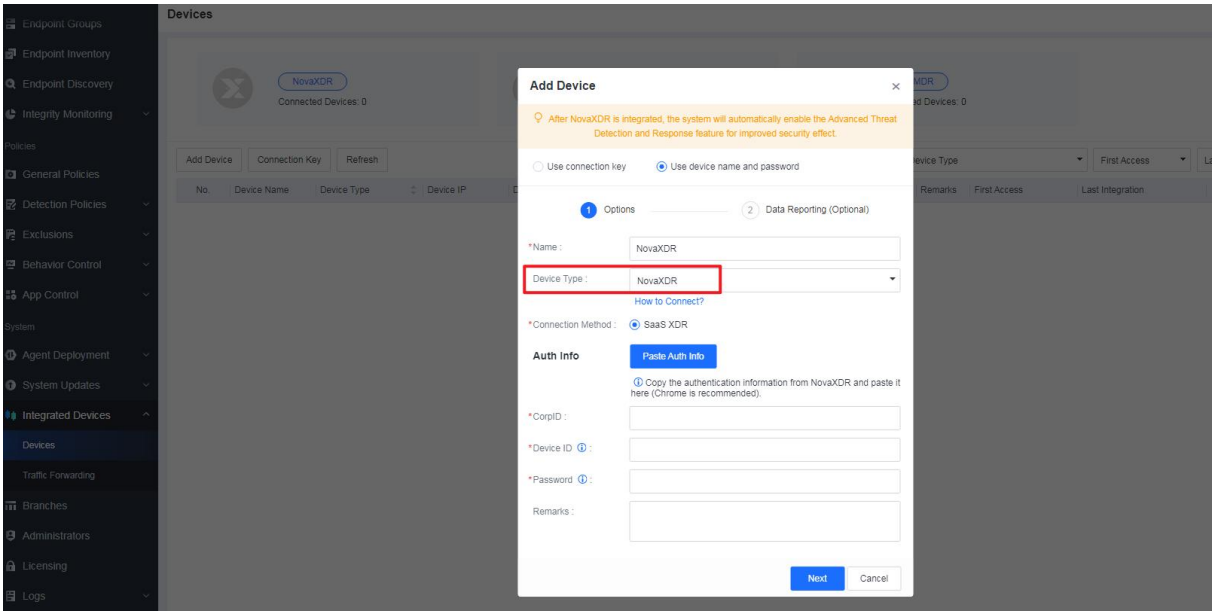


Step 6: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

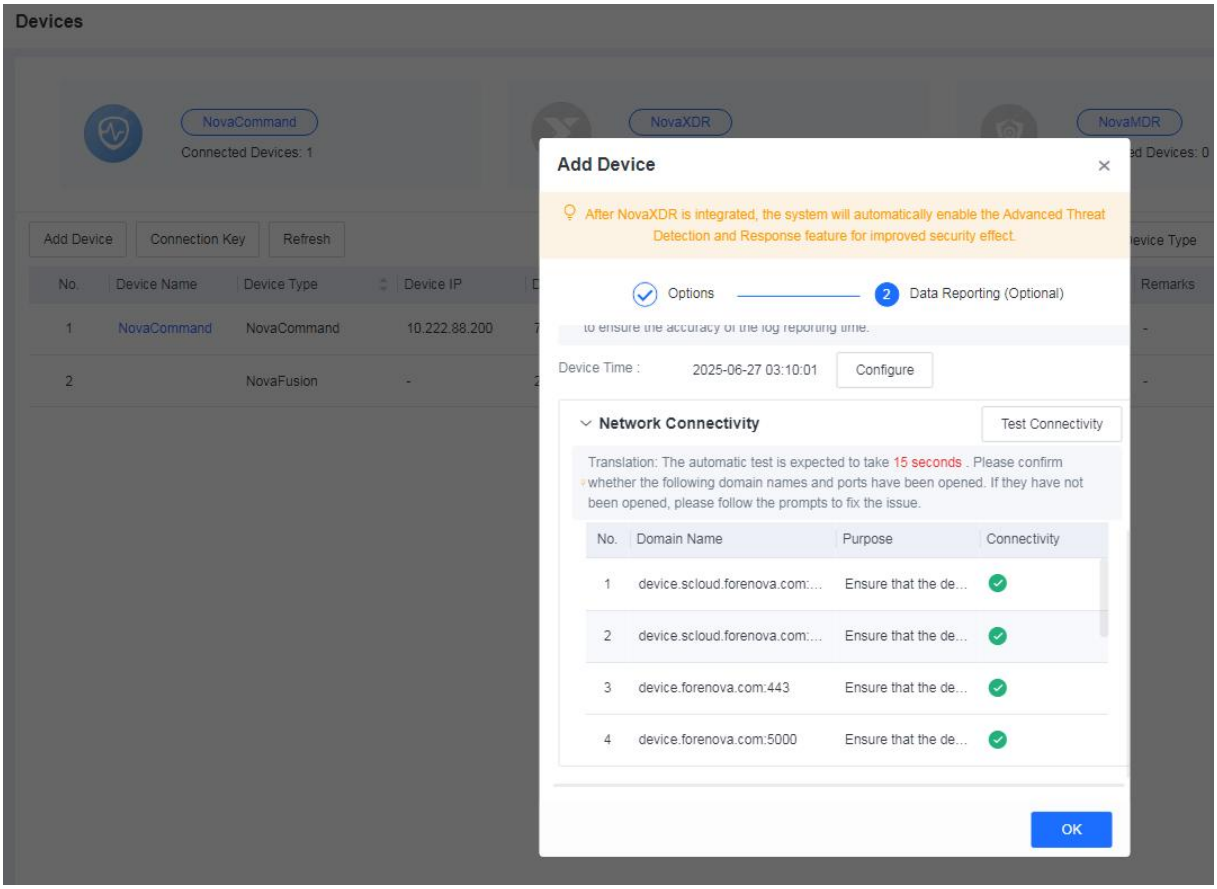


2.2 NovaXDR

- **Integration Method:** NovaGuard can be integrated with NovaXDR using the password.
- **Version Requirements:** No specific version requirements for NovaXDR.
- **Procedure:**


Step 1: Log in to NovaXDR, go to **Configuration** > **Device Connection** > **Native Devices**, then select **NovaGuard (SaaS)** for **Device Type**, as shown in the figure below. Note: The **Connection ID**, **Password**, and other relevant information of NovaGuard will automatically sync from NovaFusion, so there is no need to add NovaGuard devices manually.

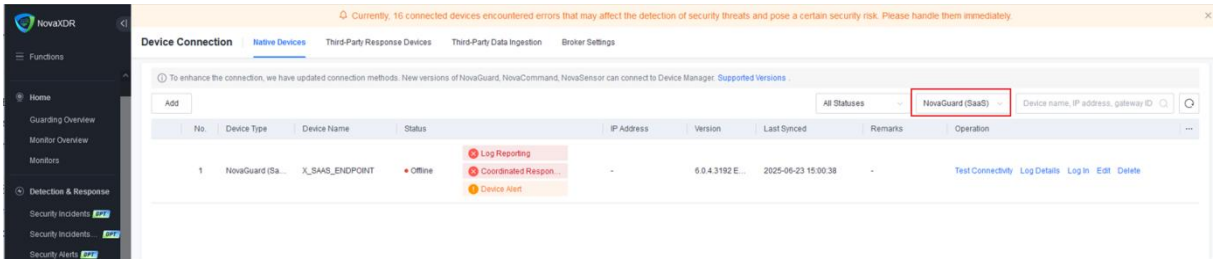


Click **Edit** in the **Operation** column of the NovaGuard device entry, then click **Copy Auth Info and Confirm**, as shown in the figure below:

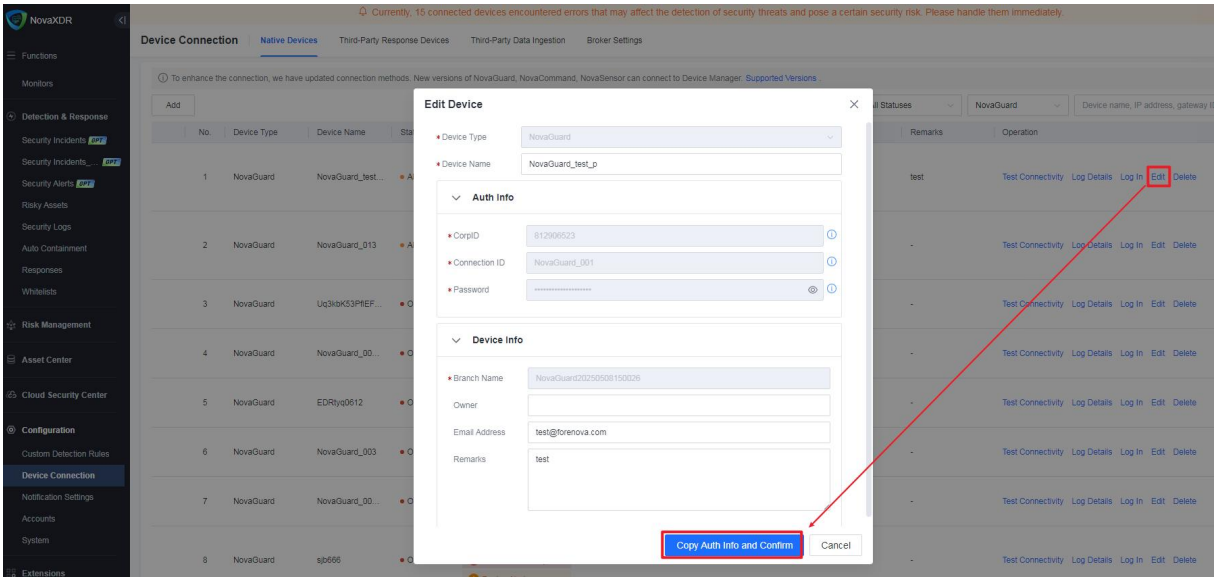

Step 2: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

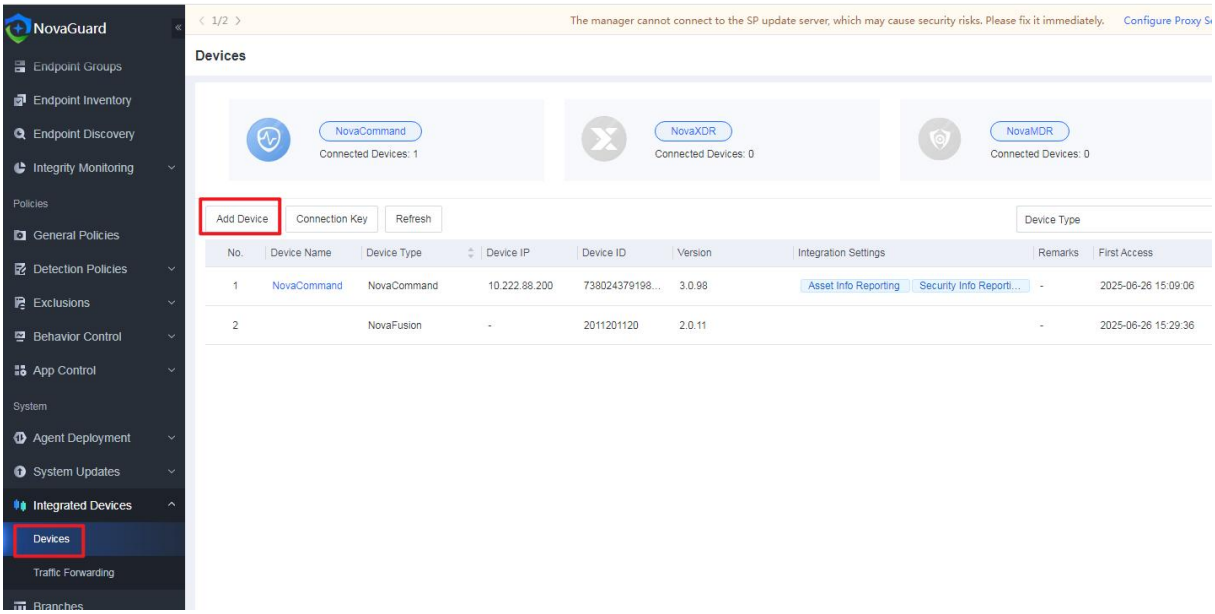

Step 3: In the **Add Device** pop-up window, click **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the authentication information copied from NovaXDR, and click **Next**, as shown in the figure below:

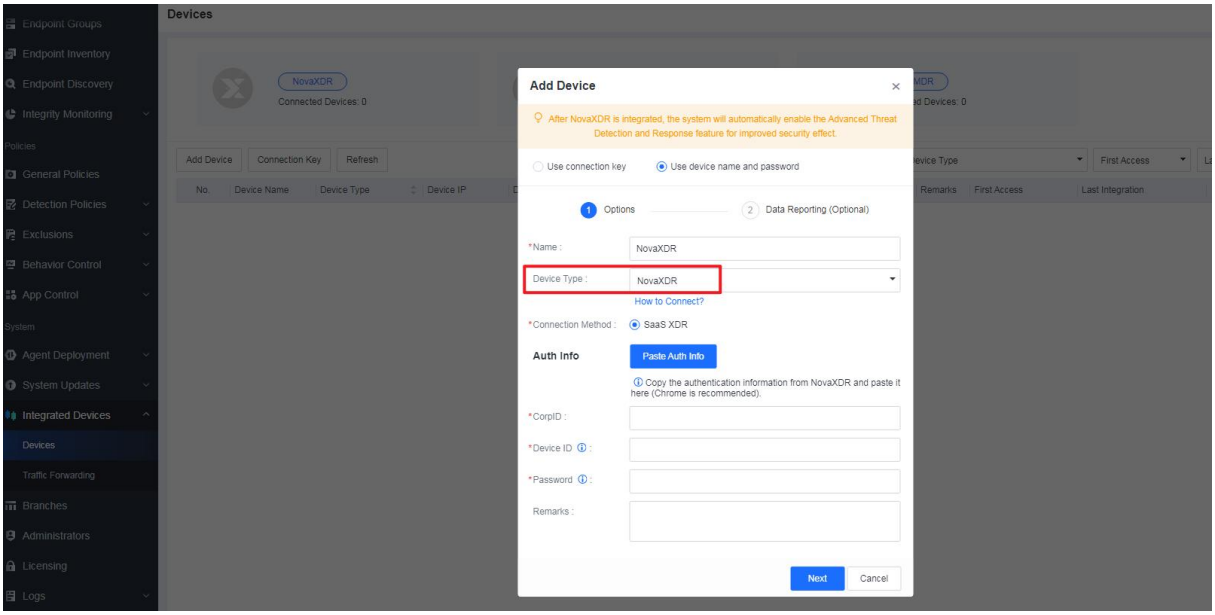

Step 4: Complete other integration settings and click **OK** after the connectivity test is

passed, as shown in the figure below:

