NovaGuard Integration Guide

Contents


1 NovaGuard (On-Premises) 1
1.1 NovaMDR 1
1.2 NovaXDR 4
1.3 NovaCommand 6
2 NovaGuard (SaaS) 9
2.1 NovaMDR 9
2.2 NovaXDR 12

1 NovaGuard (On-Premises)

1.1 NovaMDR


- **Integration Method**: NovaGuard can be integrated with NovaMDR using the password.
- **Version Requirements**: No specific version requirements for NovaMDR.
- **Procedure:**

Step 1: Log in to NovaMDR, go to the **Customers** page, and click the name of a customer, as shown in the figure below:

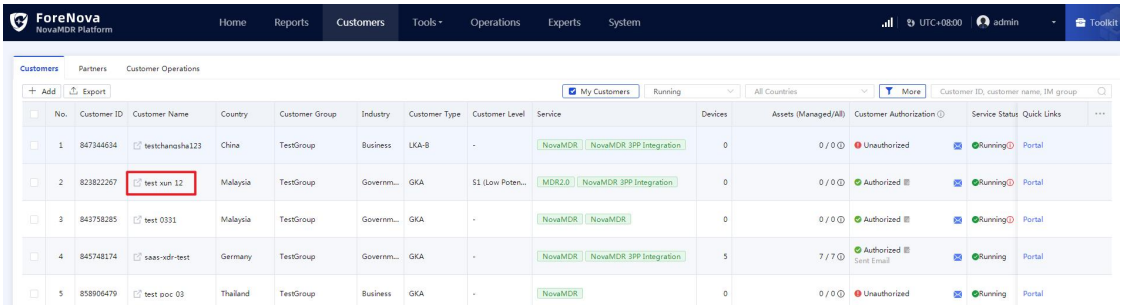


Step 2: Go to **Customers** > **Integrated Devices**, click **Add**, and select **NovaGuard/Endpoint Secure** for **Type** and **NovaXDR** for **Integration Platform**. Enter **Device Name**, **Username**, **Password**, and relevant information and click **Copy Integration Info**, as shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Integration Platform** to ensure that NovaGuard can be integrated with NovaMDR.

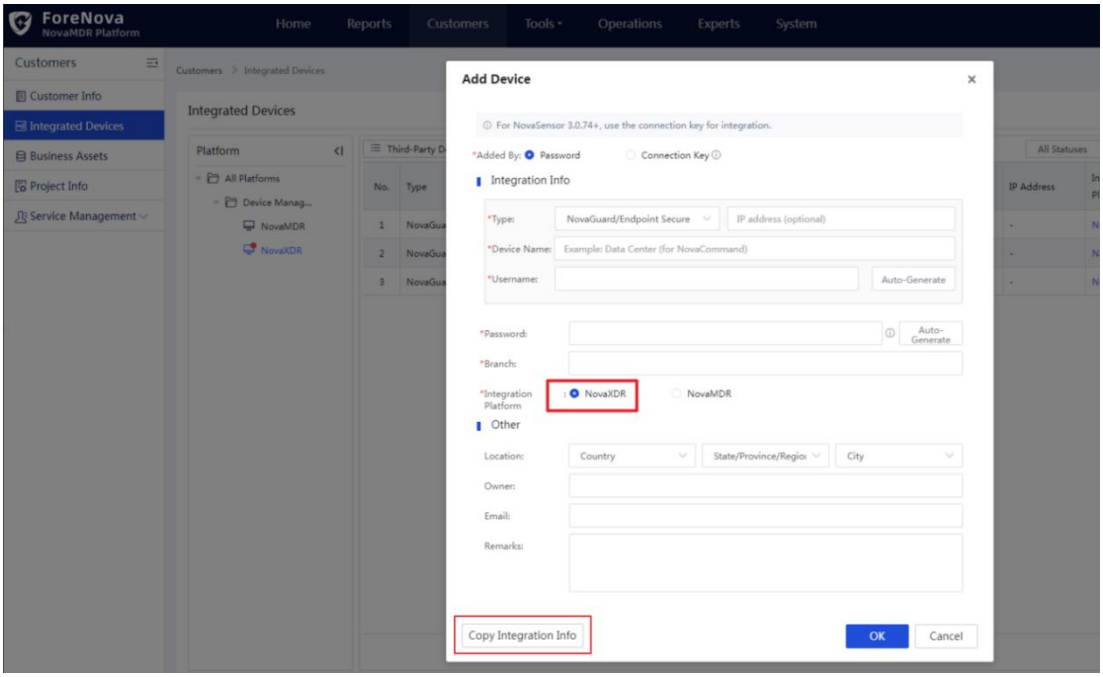


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

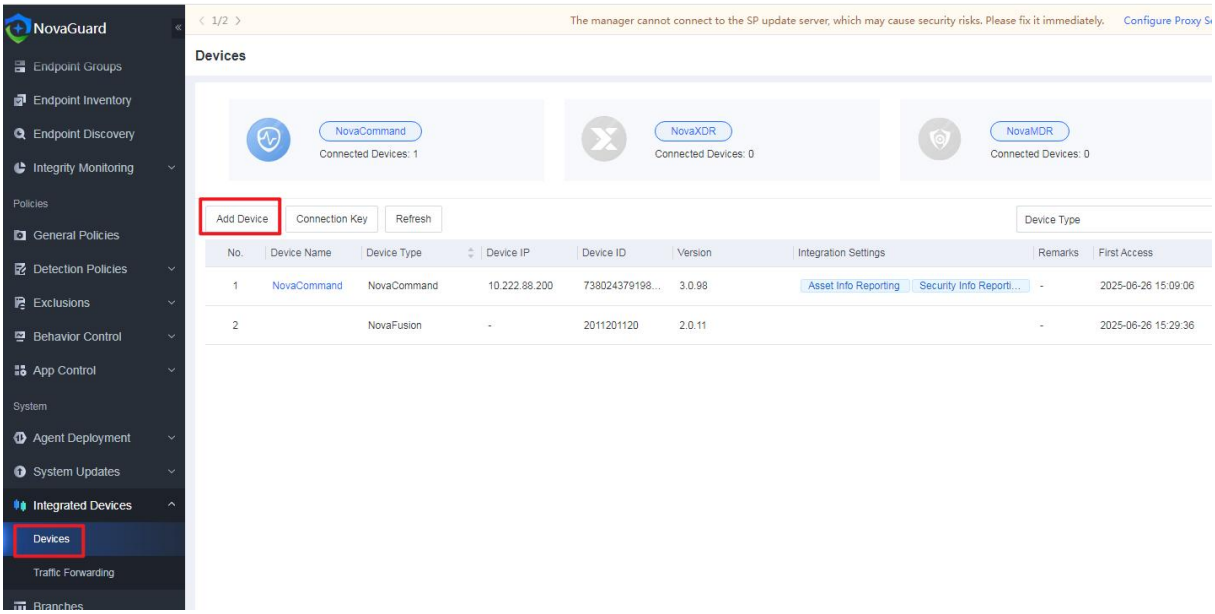


Step 4: In the **Add Device** pop-up window, select **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the integration information copied in Step 2, enter other required information, and click **Next**, as shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Device Type** to ensure that NovaGuard can be integrated with NovaMDR.

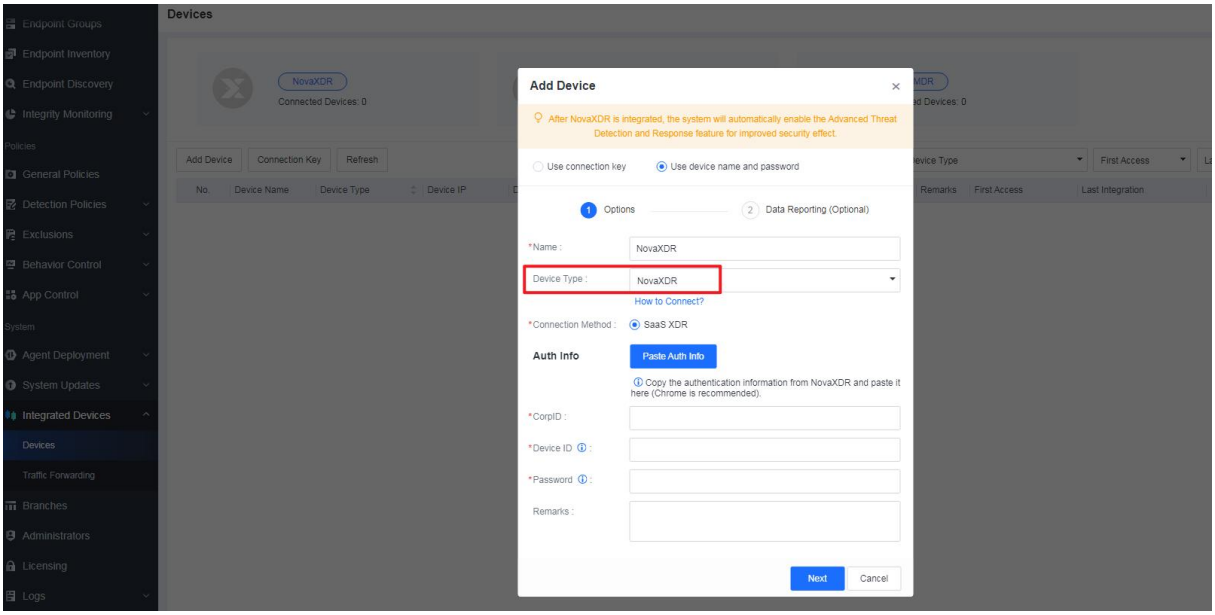


Step 5: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

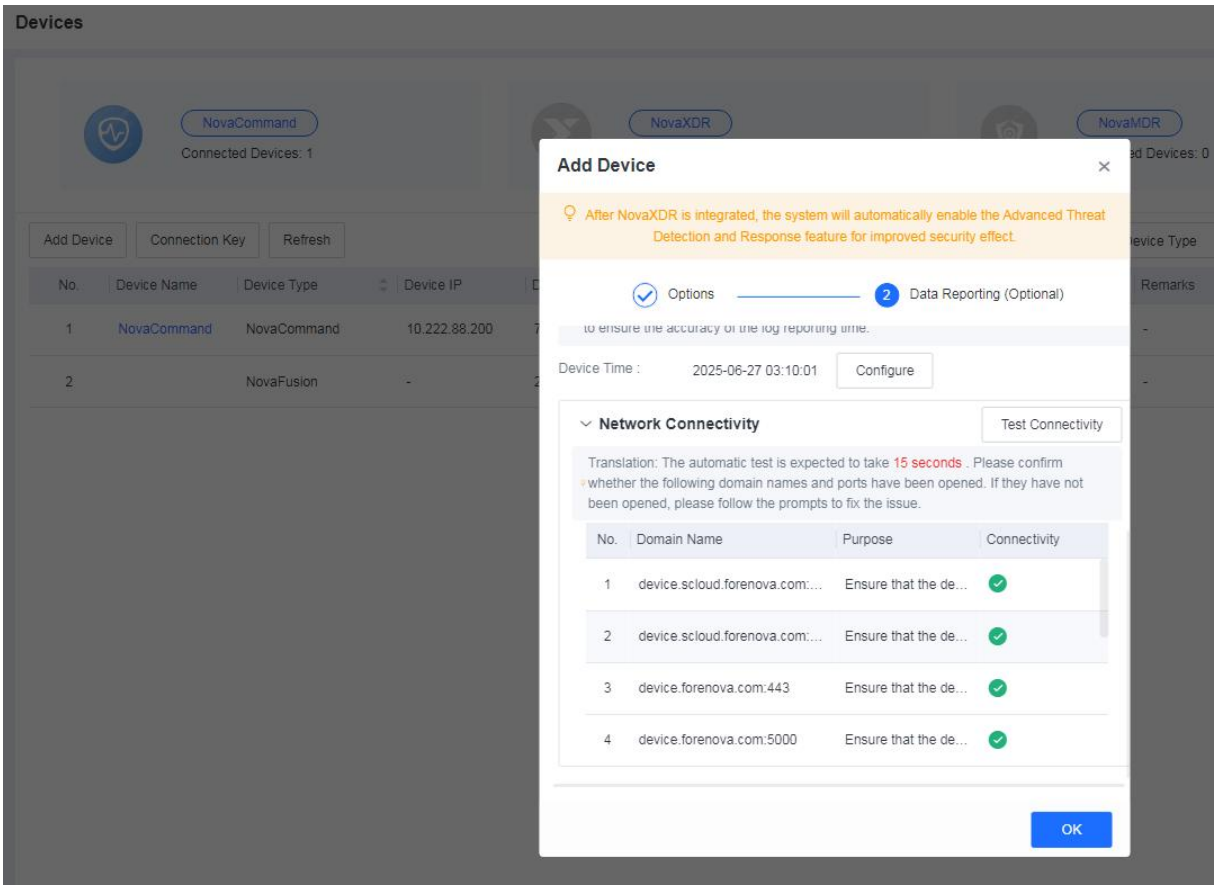


1.2 NovaXDR

- **Integration Method:** NovaGuard can be integrated with NovaXDR using the password.
- **Version Requirements:** No specific version requirements for NovaXDR.
- **Procedure:**


Step 1: Log in to NovaXDR, go to **Configuration** > **Device Connection** > **Native Devices**, and click **Add**. In the **Add Device** pop-up window, select **NovaGuard** for **Device Type**, enter the required information, and click **Copy Auth Info and Confirm**, as shown in the figure below:

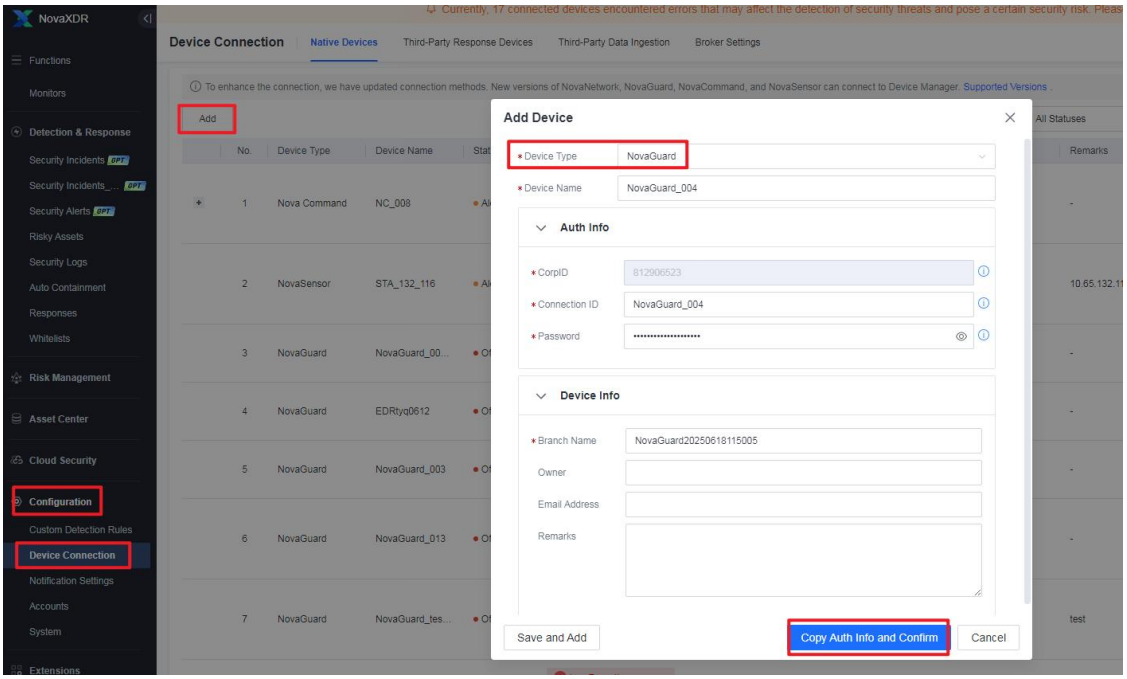


Step 2: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

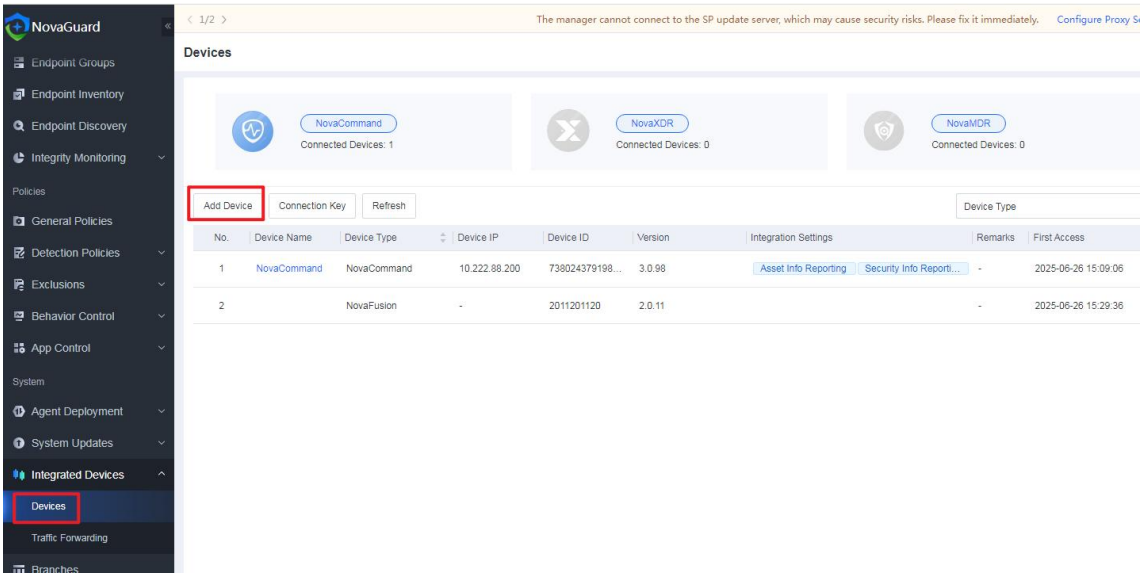

Step 3: In the **Add Device** pop-up window, click **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the authentication information copied from NovaXDR, and click **Next**, as shown in the figure below:

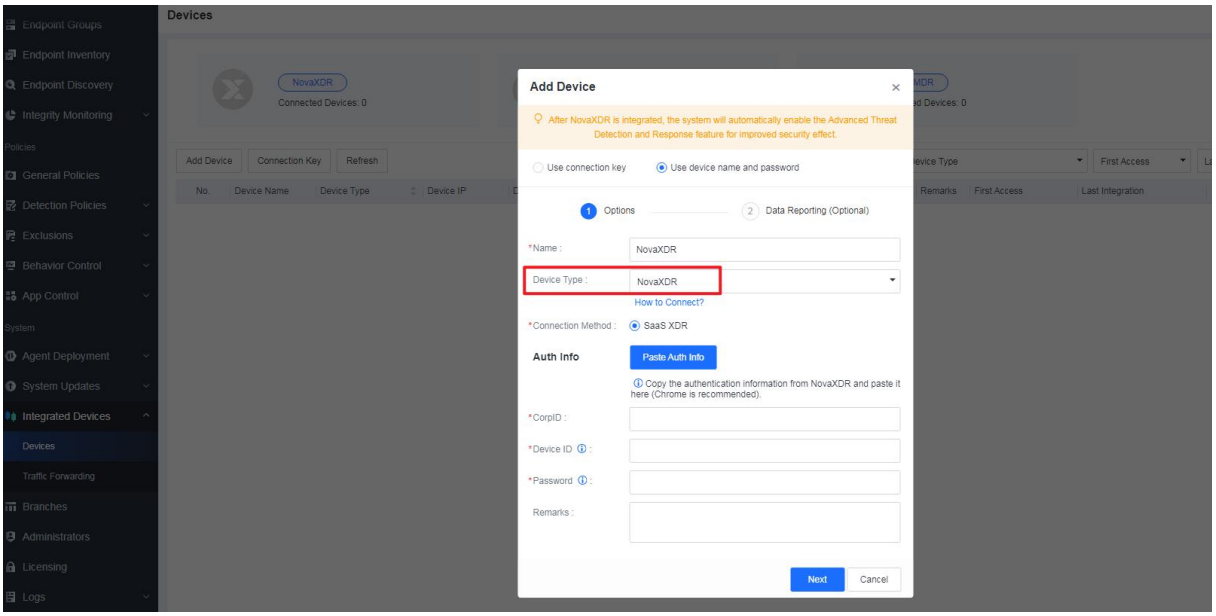

Step 4: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

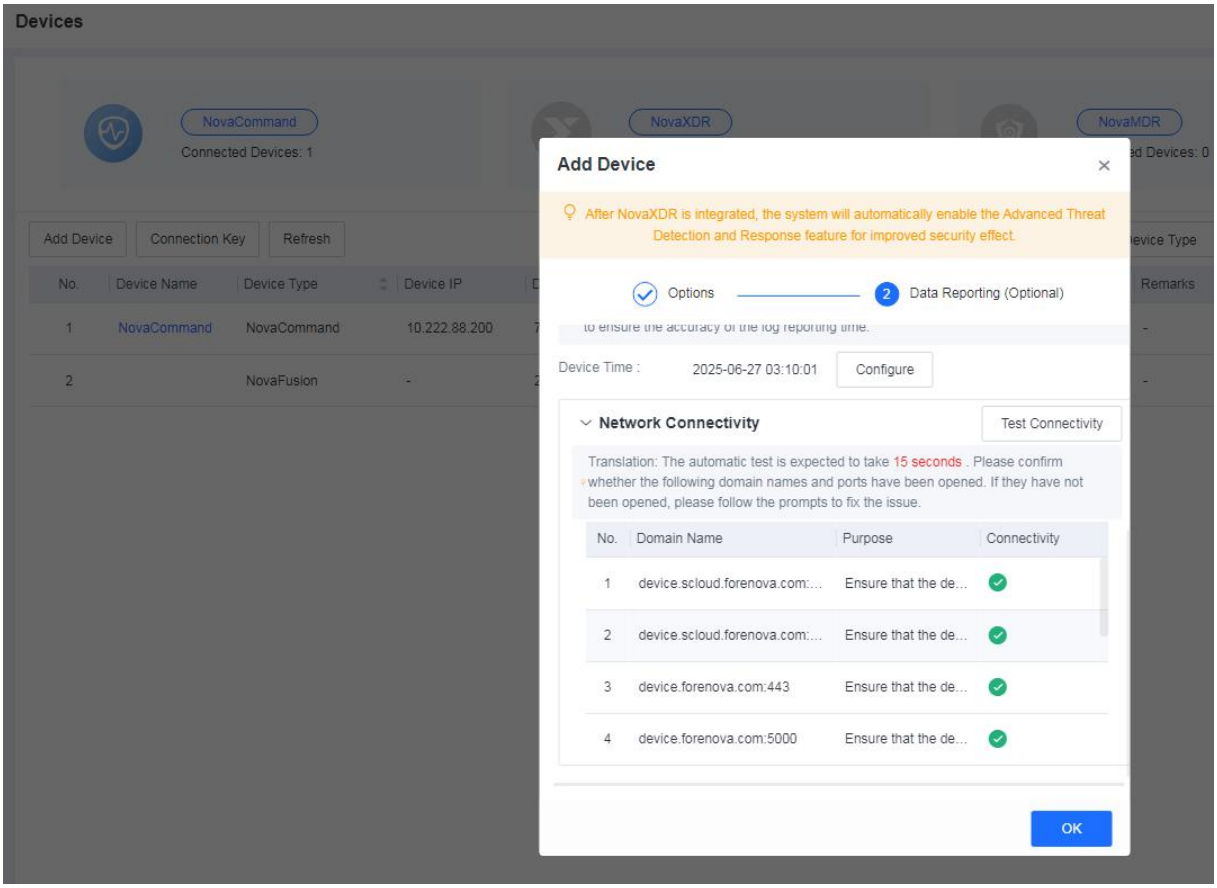


1.3 NovaCommand


- **Integration Method:** NovaGuard can be integrated with NovaCommand using the connection key or password.
- **Version Requirements:** NovaCommand 3.0.86 and later.
- **Procedure:**

Part 1: Integration


Step 1: Log in to NovaCommand, go to **System** > **Devices** > **Sensor Devices**, and click **New**, as shown in the figure below:

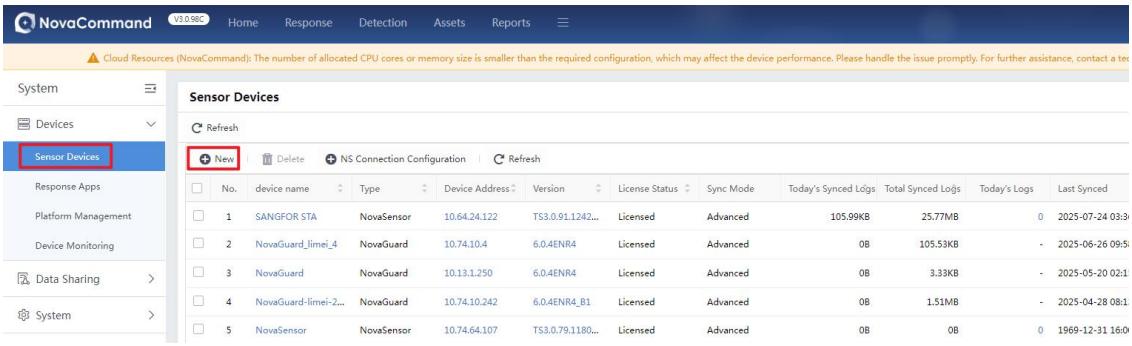


Step 2: In the **New** pop-up window, select **NovaGuard** for **Type**, specify a custom device name, enter the IP address of the NovaGuard manager for **Device IP**, select **3.8.8 and later** for **Version**, click **Generate Integration Key**, and click **Copy the above integration information**, as shown in the figure below:

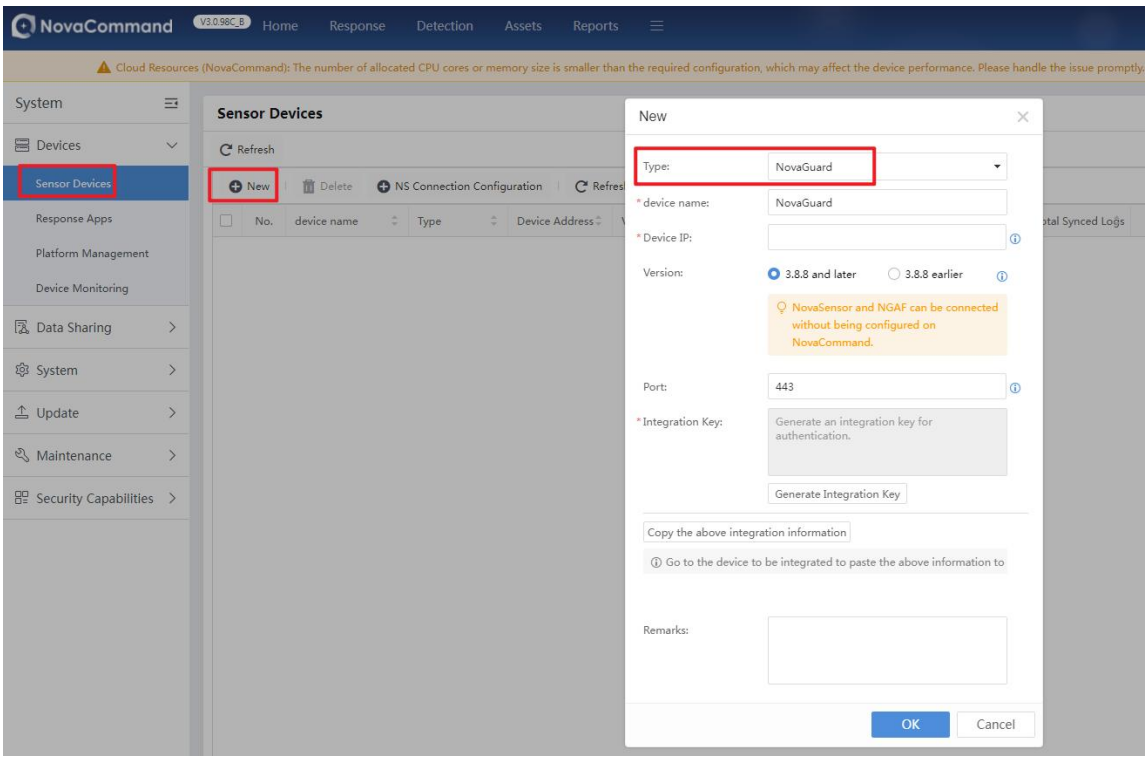


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

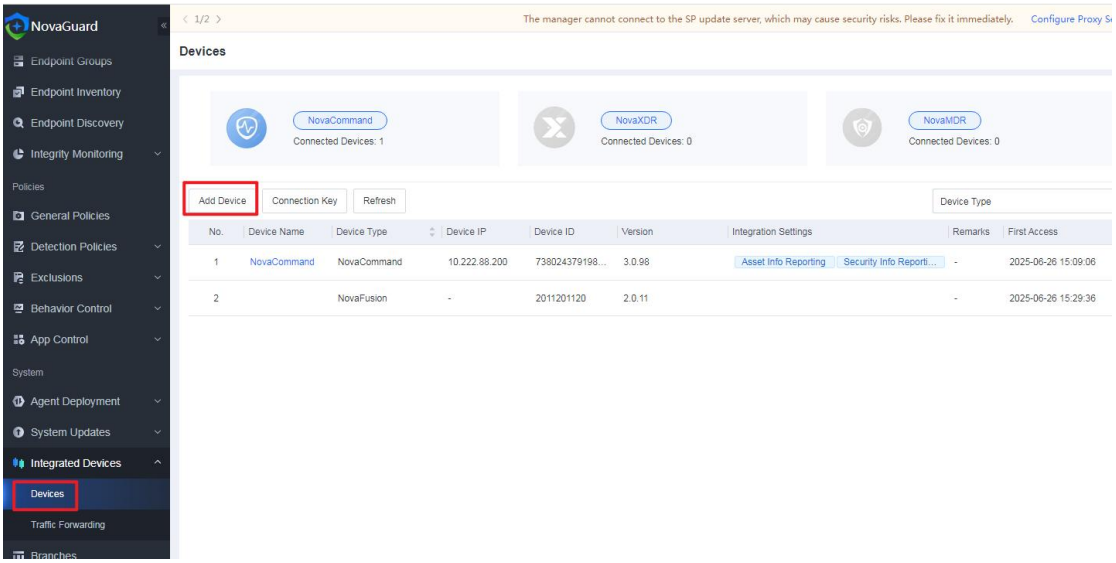

Step 4: In the **Add Device** pop-up window, select **Use connection key**, paste the connection key copied in Step 2, and click **Next**, as shown in the figure below:

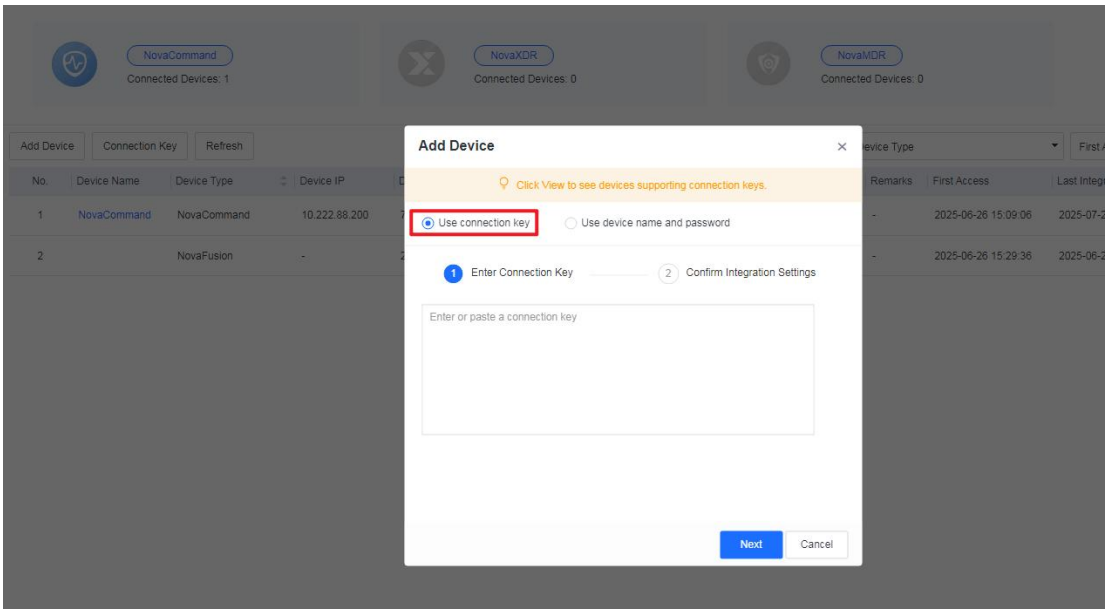


Step 5: After the integration is successful, a device of the **NovaCommand** type will appear on the **System** > **Integrated Devices** > **Devices** page in the NovaGuard manager, as shown in the figure below:

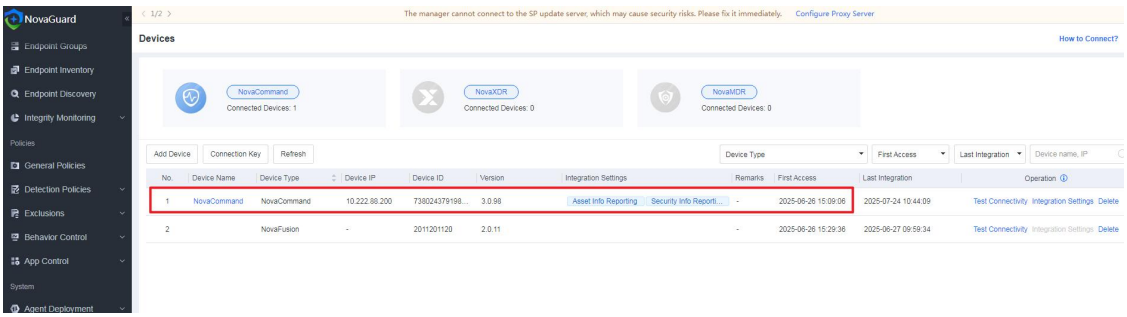


Part 2: Coordinated Response

Step 1: Log in to NovaCommand, go to **System** > **Devices** > **Response Apps**, and click **NovaGuard**, as shown in the figure below:

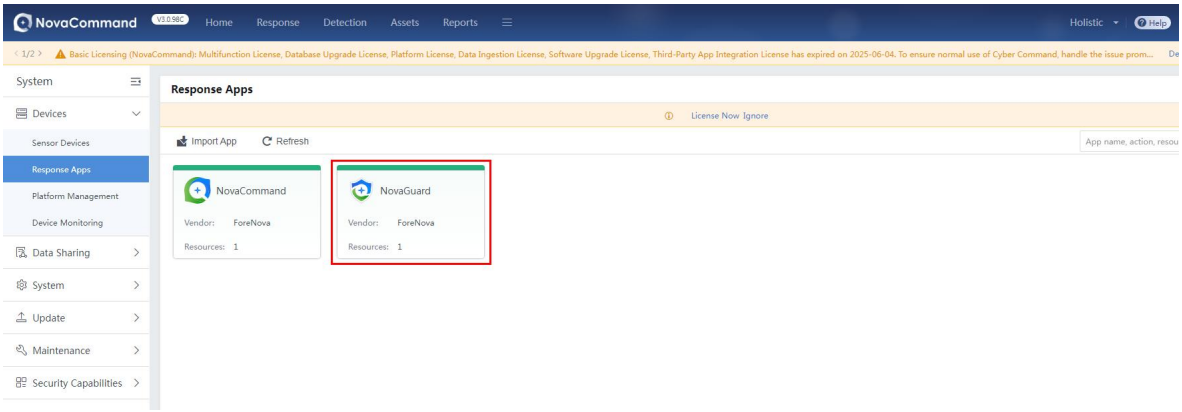

Step 2: In the **Resource Configuration** section, click **New**. In the **Add Resource** pop-up window, enter the required information and click **OK**, as shown in the figure below:

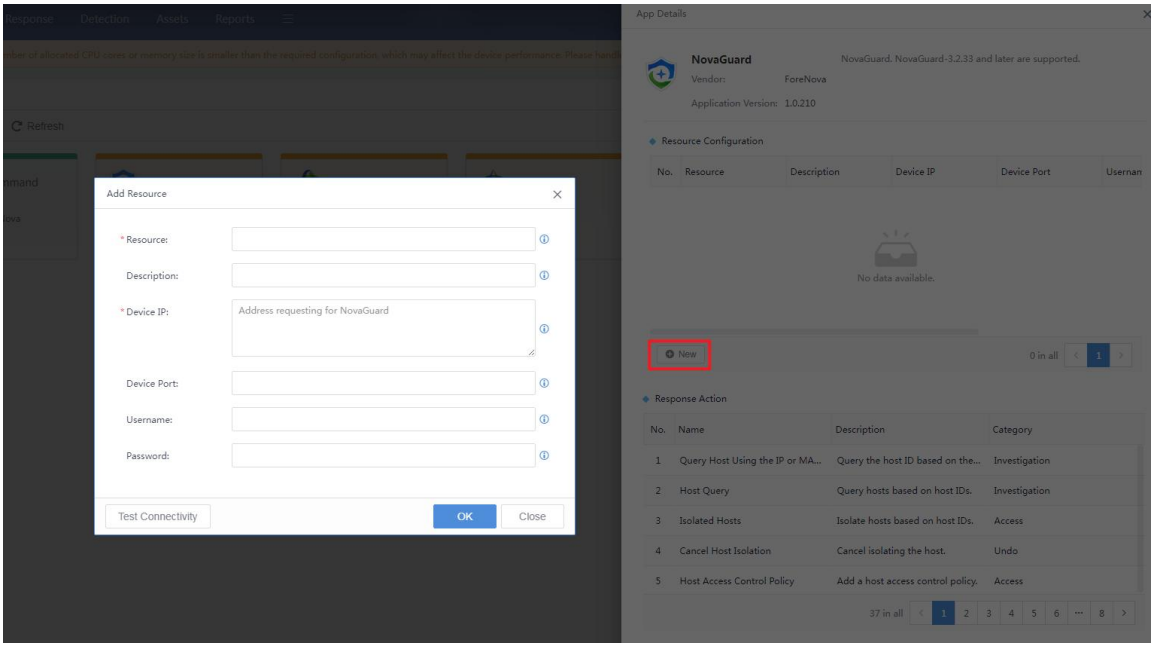


2 NovaGuard (SaaS)

2.1 NovaMDR


- **Integration Method**: NovaGuard can be integrated with NovaMDR using the password.
- **Version Requirements**: No specific version requirements for NovaMDR.
- **Procedure:**

Step 1: Log in to NovaMDR, go to the **Customers** page, and click the name of a customer, as shown in the figure below:

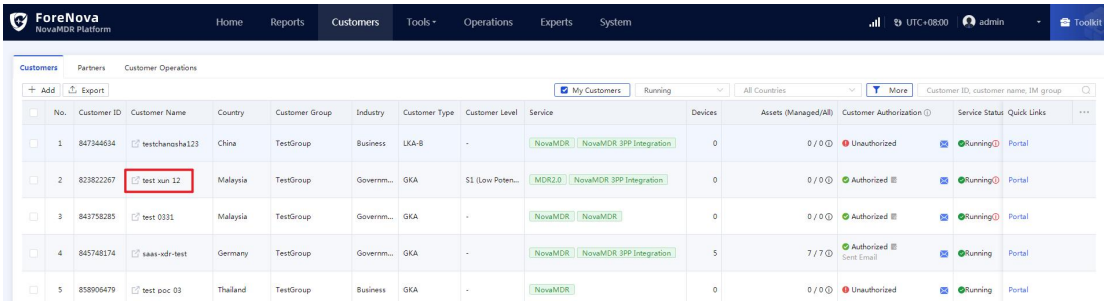


Step 2: Go to **Customers** > **Integrated Devices** and select **SAAS-NovaGuard** for **Type**, as shown in the figure below. Note: The **Username**, **Password**, and other relevant information of NovaGuard will automatically sync from NovaFusion, so there is no need to add NovaGuard devices manually.


Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Integration Platform** to ensure that NovaGuard can be integrated with NovaMDR.

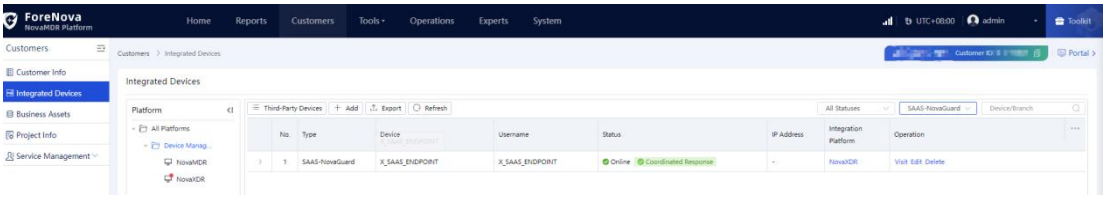

Click **Edit** in the **Operation** column of the NovaGuard device entry, then click **Copy Integration Info** to copy the information, as shown in the figure below:

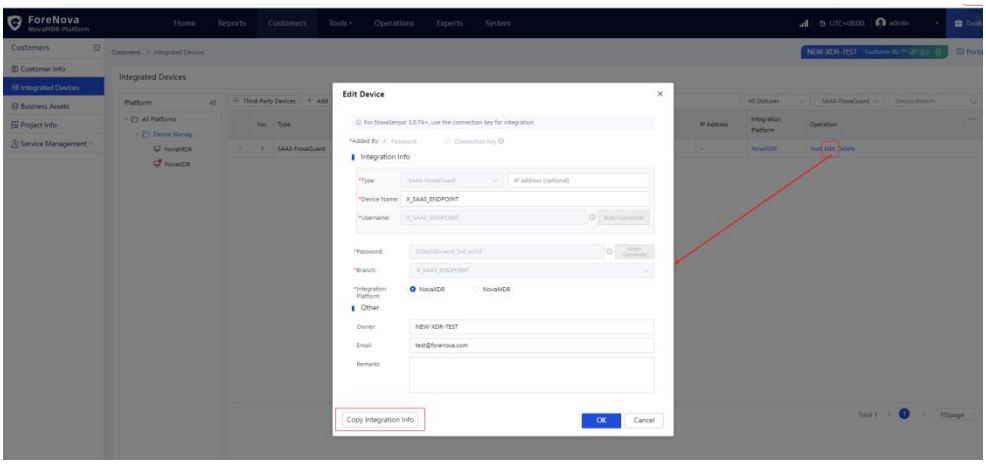


Step 3: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

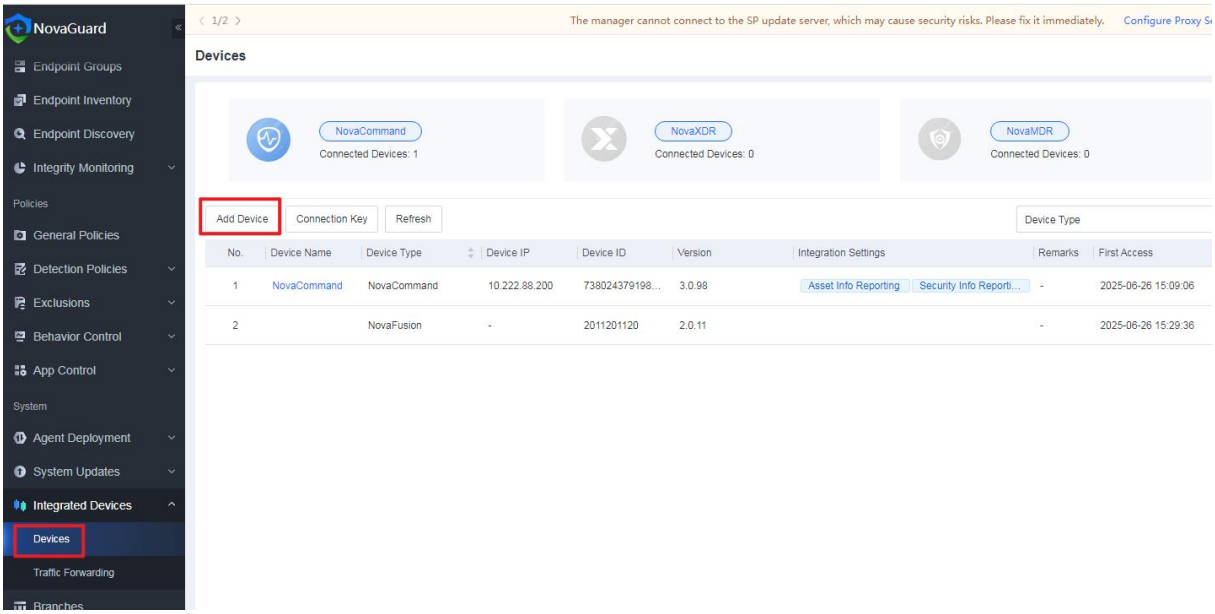


Step 4: In the **Add Device** pop-up window, select **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the integration information copied in Step 2, enter other required information, and click **Next**, as shown in the figure below:

Note: NovaMDR is based on the NovaXDR framework. Select **NovaXDR** for **Device Type** to ensure that NovaGuard can be integrated with NovaMDR.

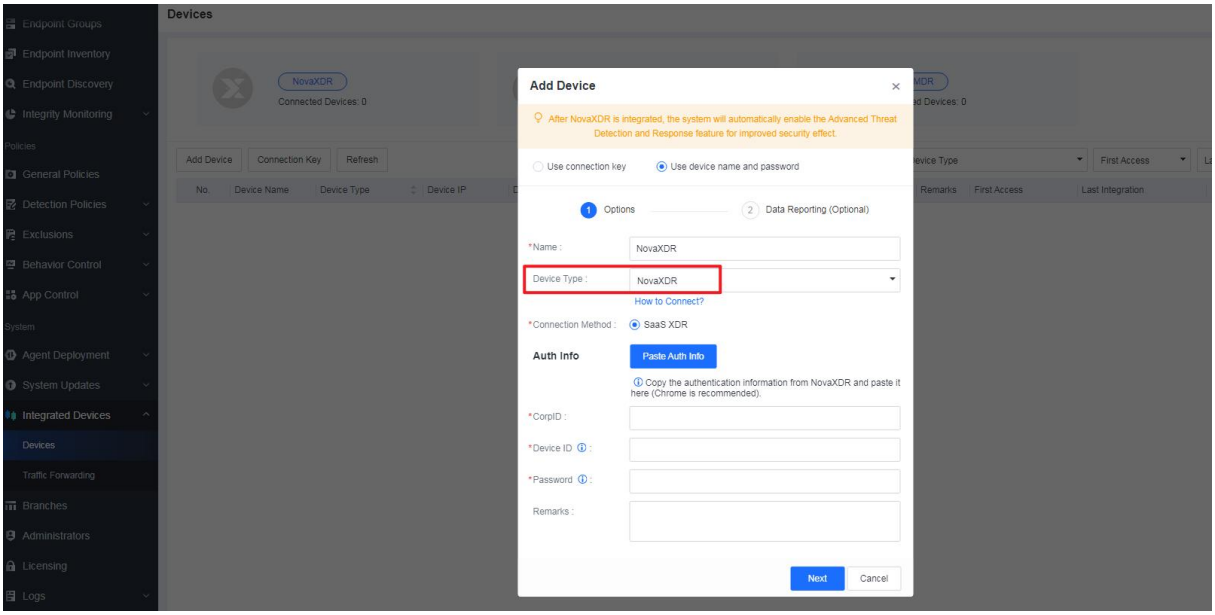


Step 5: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

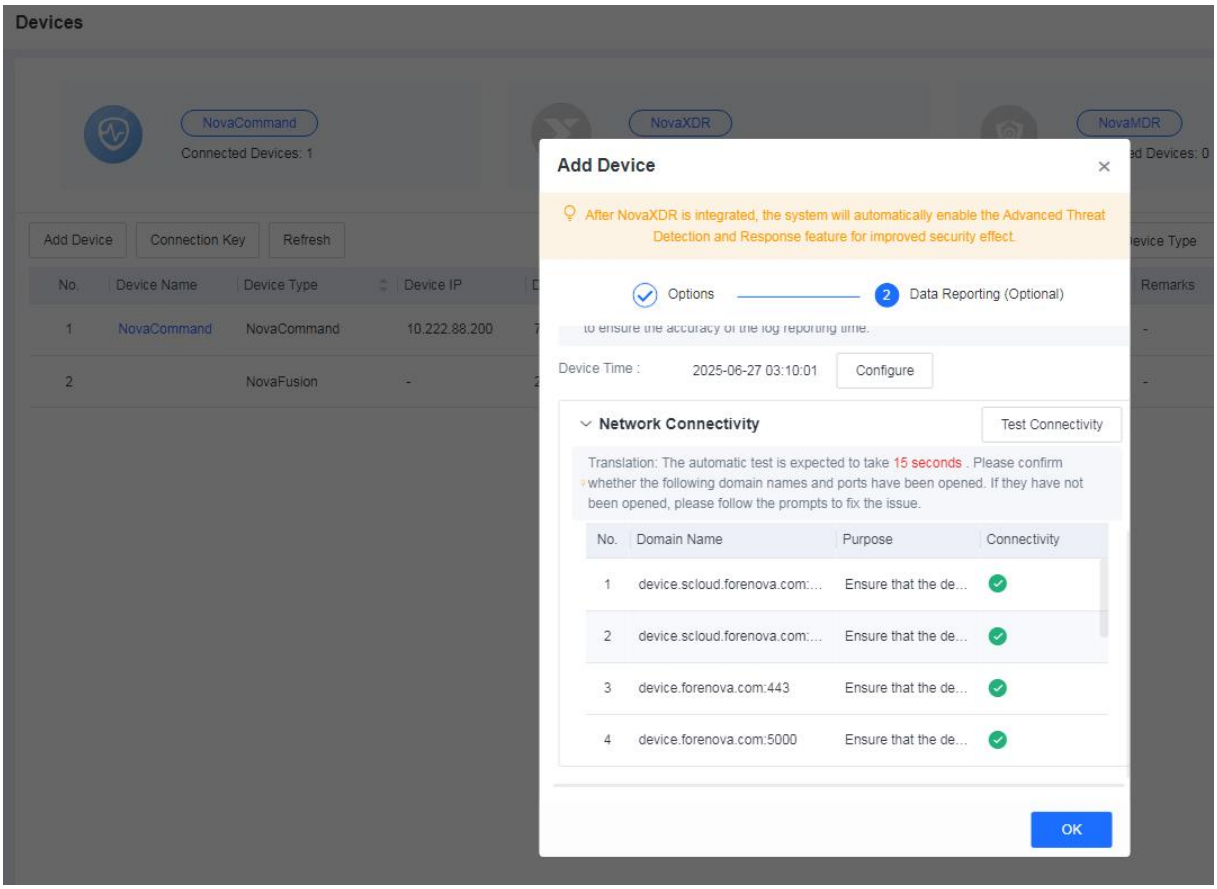


2.2 NovaXDR

- **Integration Method:** NovaGuard can be integrated with NovaXDR using the password.
- **Version Requirements:** No specific version requirements for NovaXDR.
- **Procedure:**


Step 1: Log in to NovaXDR, go to **Configuration** > **Device Connection** > **Native Devices**, then select **NovaGuard (SaaS)** for **Device Type**, as shown in the figure below. Note: The **Connection ID**, **Password**, and other relevant information of NovaGuard will automatically sync from NovaFusion, so there is no need to add NovaGuard devices manually.

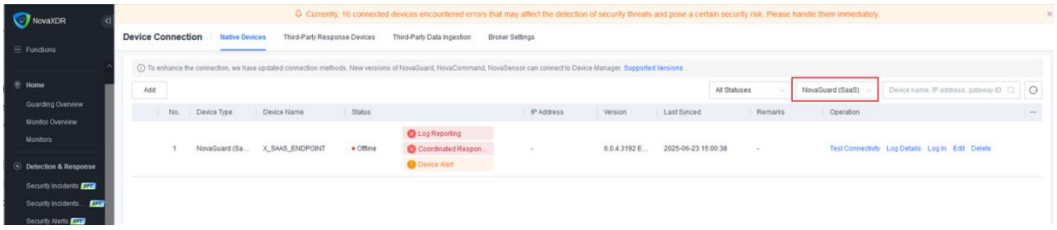


Click **Edit** in the **Operation** column of the NovaGuard device entry, then click **Copy Auth Info and Confirm**, as shown in the figure below:

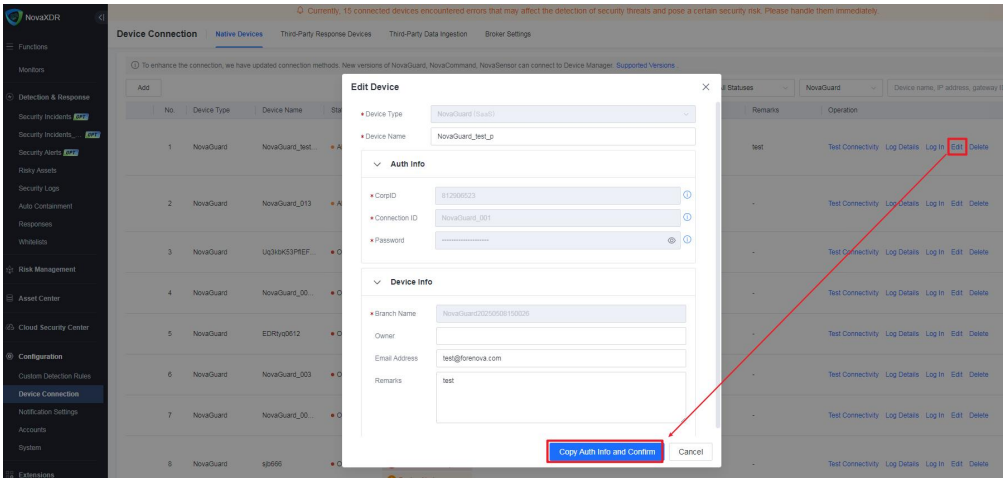

Step 2: Log in to the NovaGuard manager, go to **System** > **Integrated Devices** > **Devices**, and click **Add Device**, as shown in the figure below:

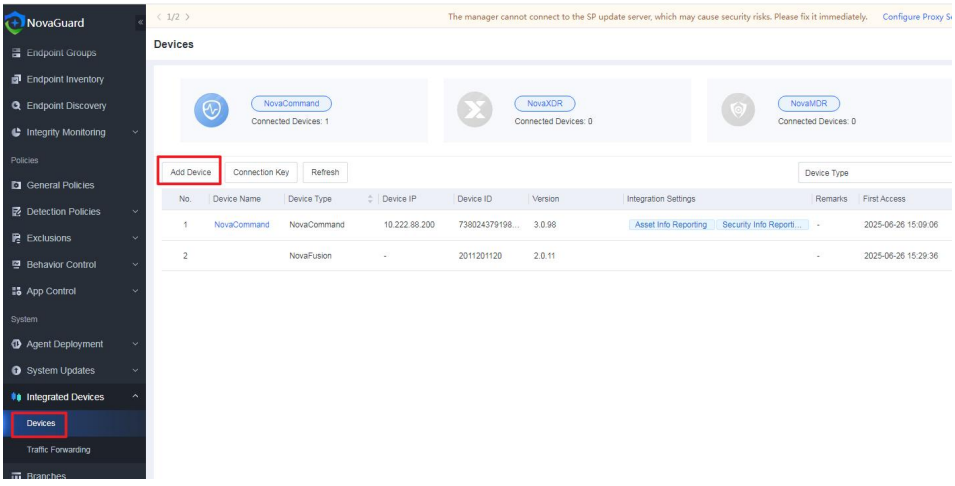

Step 3: In the **Add Device** pop-up window, click **Use device name and password**, select **NovaXDR** for **Device Type**, click **Paste Auth Info** to paste the authentication information copied from NovaXDR, and click **Next**, as shown in the figure below:

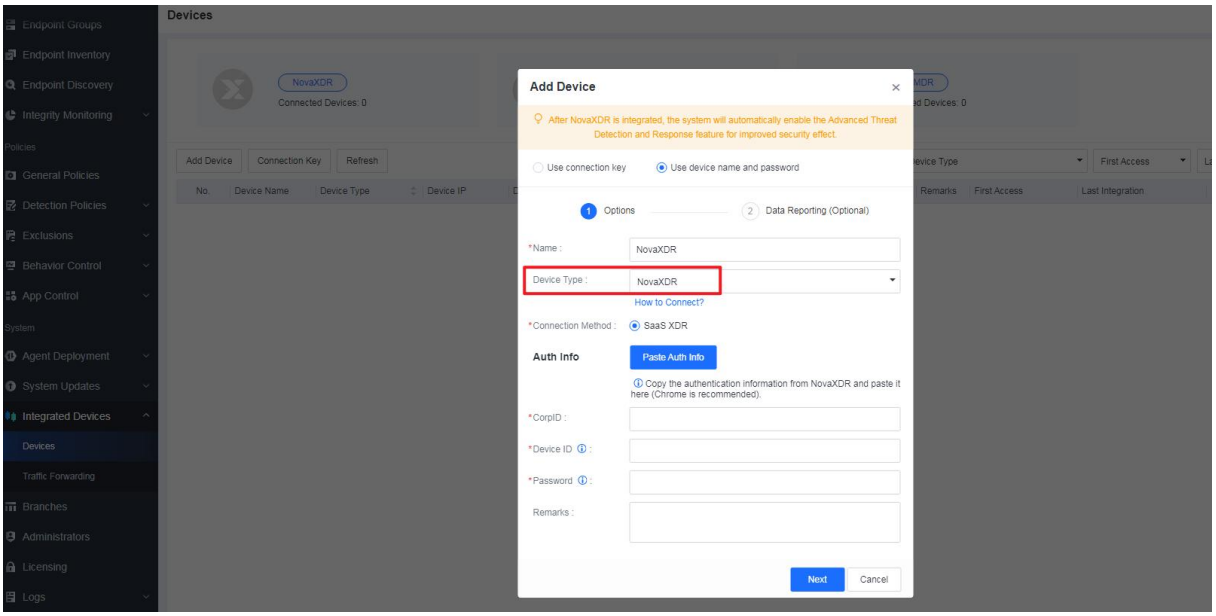

Step 4: Complete other integration settings and click **OK** after the connectivity test is passed, as shown in the figure below:

